
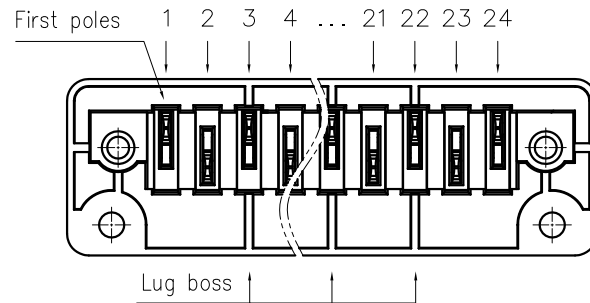
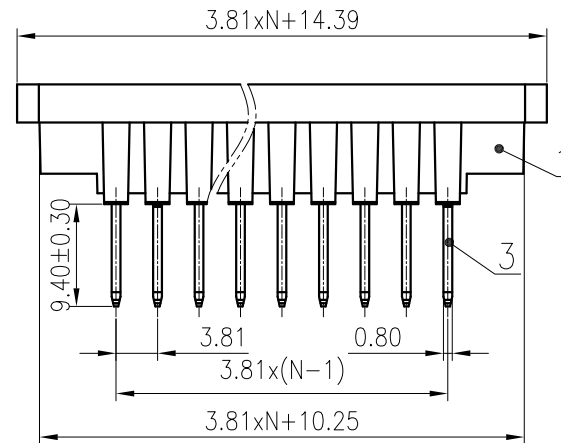




Note of the lug boss

P	Lug boss (From the left)
2	/
3	/
4	3
5	3
6	3, 5
7	3, 5
8	3, 5, 7
9	3, 5, 7
10	3, 5, 7, 9
11	3, 5, 7, 9
12	3, 5, 7, 9, 11
13	3, 5, 7, 9, 11
14	3, 5, 7, 9, 11, 13
15	3, 5, 7, 9, 11, 13
16	3, 5, 7, 9, 11, 13, 15
17	3, 5, 7, 9, 11, 13, 15
18	3, 5, 7, 9, 11, 13, 15, 17
19	3, 5, 7, 9, 11, 13, 15, 17
20	3, 5, 7, 9, 11, 13, 15, 17, 19
21	3, 5, 7, 9, 11, 13, 15, 17, 19
22	3, 5, 7, 9, 11, 13, 15, 17, 19, 21
23	3, 5, 7, 9, 11, 13, 15, 17, 19, 21
24	3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23

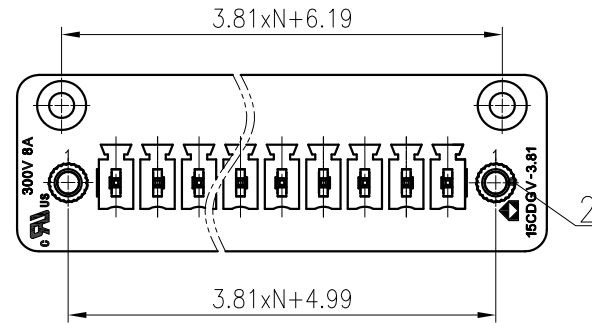


未注公差/General tolerances(mm)														0.1/10
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

PCB LAYOUT

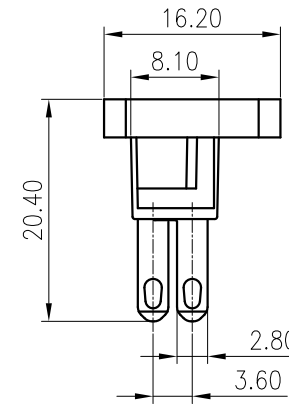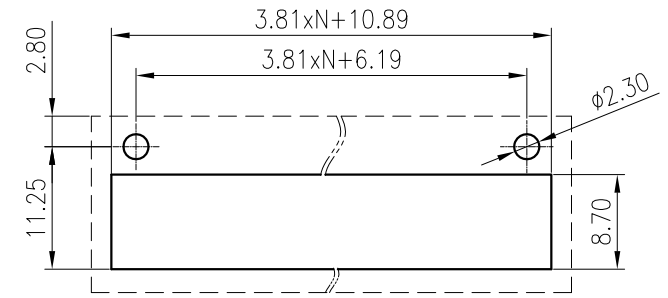

3	Pin	Copper alloy	Sn Plated
2	Nut	Copper alloy	
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		II/2	
额定电压/电流/Rated Voltage(V)/Current(A)		250/7	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5	
间距/Pitch(mm)/线数范围/Poles		3.81/N=02~24P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:		SURFACE:	
MAT NO.: /	DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	NAME: 15CDGV-3.81-XXP-1Y-00A(H)	
STATUS: /			
APPD: Lan ChH 2020.06.10			
CHKD: Yu JZh 2020.06.10			
DRFT: ZX 2017.03.28	DRAWING NO.: 15CDGV-3.81-C01	REV	T1
 SIZE: A4 	TYPE: CUSTOMER DRAWING	SCALE: 1.5:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------