


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		图面更新	LIN	05/05/08	
△		图面更新	LIN	05/09/08	
△		增加VDE, UL, CE刻字	LJH	02/10/09	

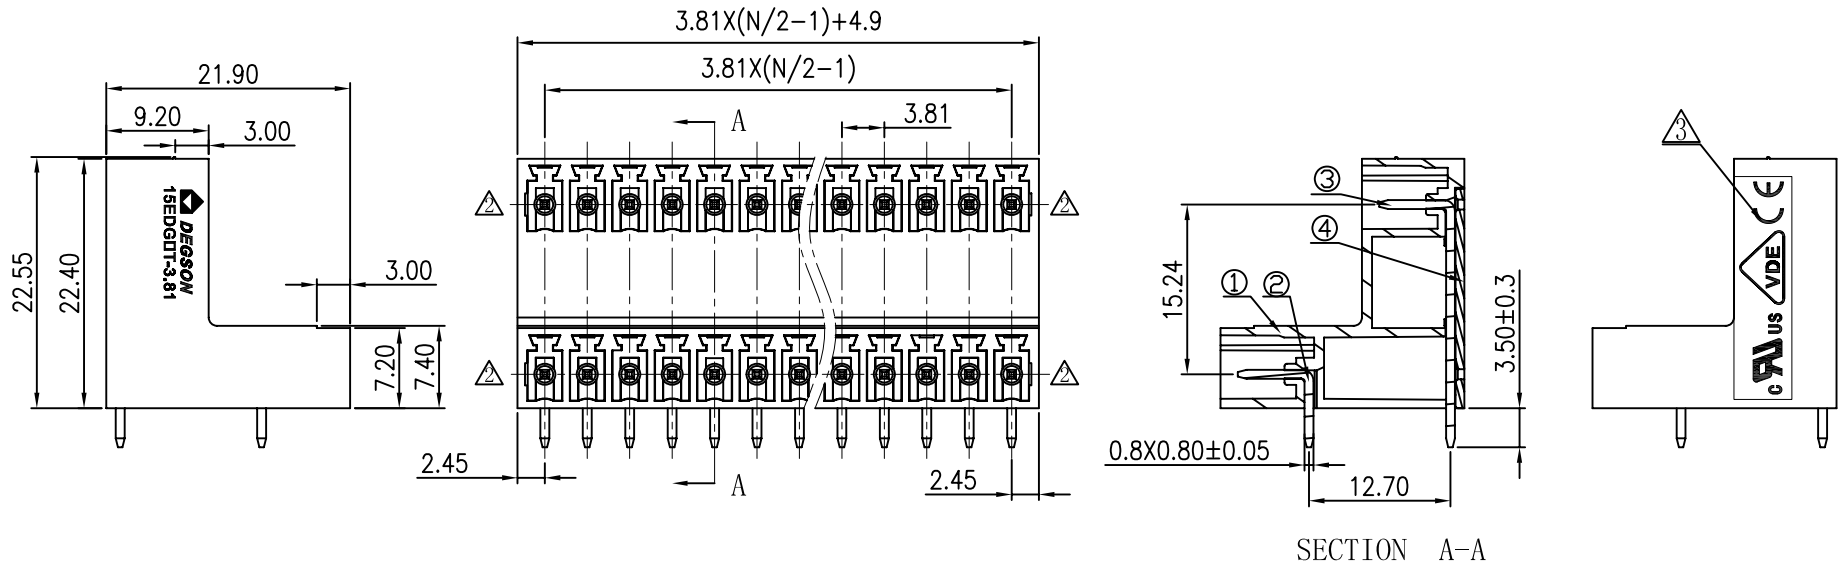

Notes:

1. Pitch:3.81mm , Poles:4-48P
2. Rated voltage/current:UL 300V/8A
VDE 250V/7A
3. Operation temperatures:-40°C~+105°C
4. Withstanding Voltage:AC2000V/1min
5. Insulation Resistance:5000MΩ /DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
	over 6	over 10		over 30	over 60	over 100	over 150	∩	
to 6	to 10	to 24	to 30	to 60	to 100	to 150		◊	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/1.0	

4	15EDGRT-Cover	1049COYXXA (H)	1	PA66	UL94V-0
3	15EDGR-Pin	1003B00010 (H)	XX/2	Brass	SnCe
2	15EDGRT-length Pin	1049B00010 (H)	XX/2	Brass	SnCe
11	15EDGRT-Housing	1049AOYXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS		MM (INCH)	DFTD LIN	DATE 07/24/07"	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
TOLERANCES EXCEPT AS NOTED		CHKD	DATE	NAME 15EDGRT-3.81-XXP-1Y-00A(H)	
MM		MFD	DATE		
.0 ±		APPVL	DATE	DRAWING NO. 15EDGRT-3.81-E01	
.00 ±		MATERIAL :		/PART NO.	SIZE A3
.000 ±		ANGLES ± 1°		FINISH:	REV T3
THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING	02/10/09
				SHEET 1	OF 1