


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	LIN	05/05/08
△		增加VDE, UL, CE刻字	LJH	02/10/09

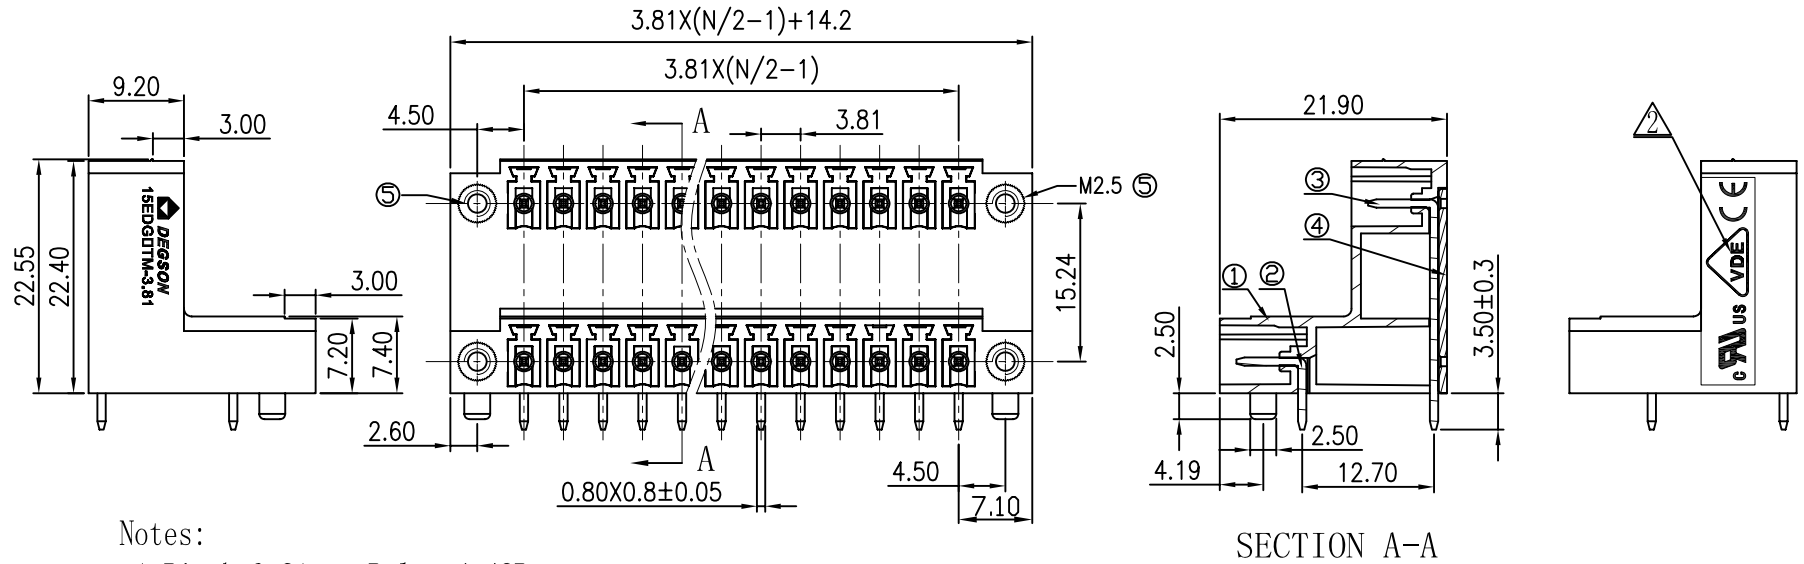

Notes:

1. Pitch: 3.81mm , Poles: 4-48P
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	—	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
5	2EDG-Screw cap	S000000040 (H)	4	Brass	
4	15EDGRT-Cover	1049COYXXA (H)	1	PA66	UL94V-0
3	15EDGR-Pin	1003B00010 (H)	XX/2	Brass	SnCe
2	15EDGRT-length pin	1049B00010 (H)	XX/2	Brass	SnCe
1	15EDGRTM-Housing	1051AOYXXC (H)	1	PA66	UL94V-0

DETACHED LISTS	MM (INCH)	DFTO LIN	DATE 07/24/07"	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFD	DATE		
		APPVL	DATE		
	NAME	15EDGRTM-3.81-XXP-1Y-00A(H)			
	ANGLES ± 1°	G.E	DRAWING NO. 15EDGRTM-3.81-E01		
	THIRD ANGLE PROJECTION	FINISH:	/PART NO.		
		SCALE: 1:1	DO NOT SCALE DRAWING		
			SHEET 1 OF 1		