


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Willis	2014/07/18
2	Corrected date code, Revised frame	FROS	2015/04/23

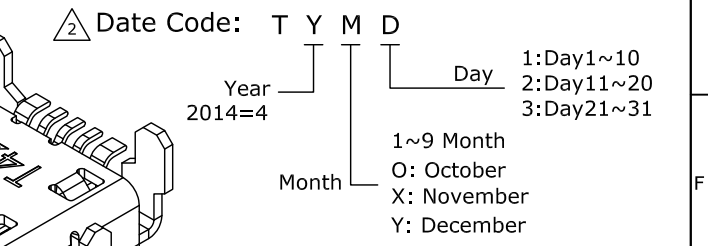

SPECIFICATION:

- ELECTRICAL**
 - Current Rating: Signal: 1.0A (Pin2,3,4)
Power: 1.8A(Pin1,5)
 - Voltage Rating: 30VAC
 - Contact Resistance: Initially 30mΩ
 - Insulation Resistance: 1000MΩ
 - Dielectric Withstanding Voltage: 100VAC for 1 minute
- MECHANICAL**
 - Durability: 10000 Cycle
 - Mating Force : 35N min
 - Un-mating Force: 8N
- ENVIRONMENTAL**
 - Operating temperature range: -30°C to +85°C
 - Storage temperature range: -40°C to +85°C
- SOLDER ABILITY**
 - Recommended IR Reflow Temperature: 260°C 10Sec

3	SHELL	SUS301, NICKEL PLATING	
2	CONTACT	COPPER EFTEC97-E, CONTACT AREA: 30u" GOLD	
1	HOUSING	PA9T, UL94V-0, BLACK	
NO.	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	mm	X.X ±0.25	X.XX ±0.12
		X.X ±0.50	X.XX ±0.12
DRAWN		Willis	2014/07/18
CHECKED		Victor	2014/07/18
APPROVED		Ron	2014/07/18
SCALE		SHEET	SIZE
1/1	1/1	A4	
DRAWN NAME:		Micro USB AB Receptacle, Reverse Type, Middle Mount	
PRODUCT NO.		207E-AG00	
FILE NAME		207E-AG00_B_2	



WWW.ATTEND.COM.TW

