



20N 2.4 ϕ ×7

超小型保险丝管 (特快熔断型) MICROFUSE (VERY FAST-ACTING)

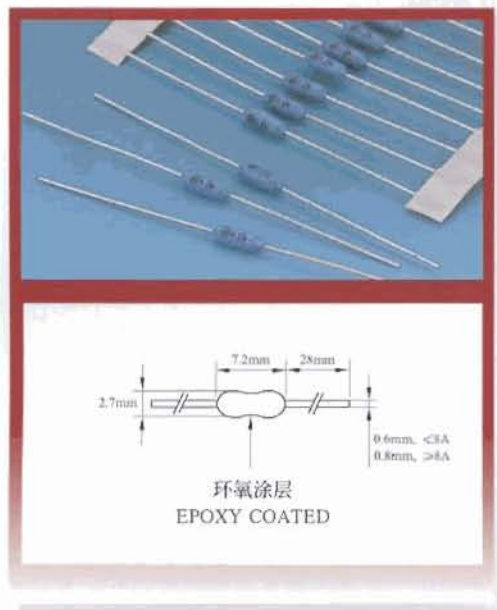

I-T CHARACTERISTICS CURVE
电流-时间曲线图

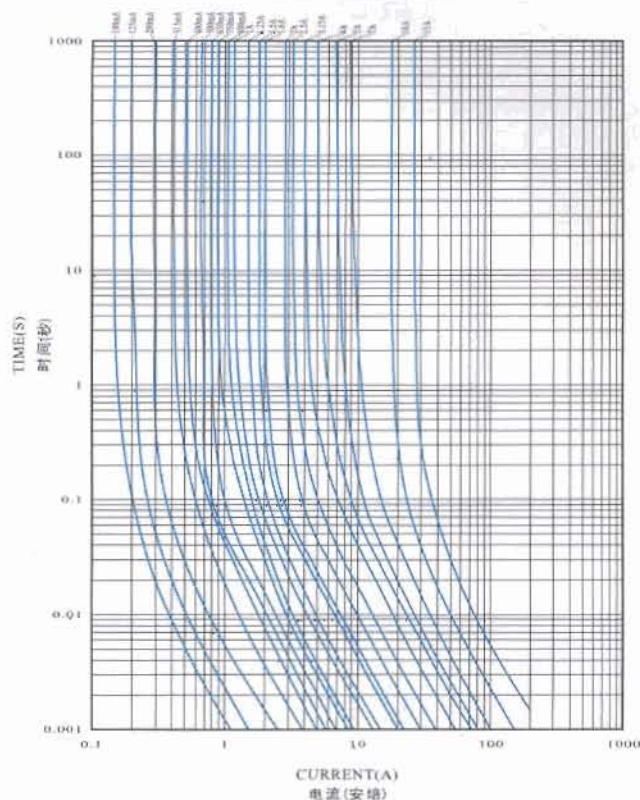

| 目录编号 CATALOG NO. | 额定电流 AMPERE RATING | 认证 APPROVALS | | | | | | | | | | I ² T 参考值 REFERENCE (A ² S) |
|---------------------|-----------------------|--------------|---|----|---|----|---|-----|---|-----|---|--|
| | | CCC | | UL | | UR | | CSA | | PSE | | |
| | | H | L | H | L | H | L | H | L | H | L | |
| 0100H/L | 100mA | | | ● | ● | | | ● | ● | | | 0.0013 |
| 0125H/L | 125mA | | | ● | ● | | | ● | ● | | | 0.0018 |
| 0160H/L | 160mA | | | ● | ● | | | ● | ● | | | 0.0029 |
| 0200H/L | 200mA | ○ | | ● | ● | | | ● | ● | | | 0.0058 |
| 0250H/L | 250mA | ○ | | ● | ● | | | ● | ● | | | 0.010 |
| 0300H/L | 300mA | | | ● | ● | | | ● | ● | | | 0.014 |
| 0315H/L | 315mA | ○ | | ● | ● | ● | | ● | ● | | | 0.018 |
| 0375H/L | 375mA | | | ● | ● | | | ● | ● | | | 0.025 |
| 0400H/L | 400mA | ○ | ● | ● | ● | | | ● | ● | | | 0.032 |
| 0500H/L | 500mA | ○ | ● | ● | ● | | | ● | ● | | | 0.045 |
| 0600H/L | 600mA | | | ● | ● | | | ● | ● | | | 0.049 |
| 0630H/L | 630mA | ○ | ● | ● | ● | | | ● | ● | | | 0.054 |
| 0700H/L | 700mA | | | ● | ● | | | ● | ● | | | 0.067 |
| 0750H/L | 750mA | | | ● | ● | | | ● | ● | | | 0.077 |
| 0800H/L | 800mA | ○ | ● | ● | ● | | | ● | ● | | | 0.095 |
| 010H/L | 1A | ○ | ● | ● | ● | | | ● | ● | ● | | 0.16 |
| 012H/L | 1.2A | | | ● | ● | | | ● | ● | ● | | 0.23 |
| 013H/L | 1.25A | ○ | ● | ● | ● | | | ● | ● | ● | | 0.29 |
| 015H/L | 1.5A | | | ● | ● | | | ● | ● | ● | | 0.45 |
| 016H/L | 1.6A | ○ | ● | ● | ● | | | ● | ● | ● | | 0.54 |
| 020H/L | 2A | ○ | ● | ● | ● | | | ● | ● | ● | | 1.1 |
| 023H/L | 2.25A | | | ● | ● | | | ● | ● | ● | | 1.4 |
| 025H/L | 2.5A | ○ | ● | ● | ● | | | ● | ● | ● | | 1.8 |
| 030H/L | 3A | | ● | ● | ● | | | ● | ● | ● | | 2.7 |
| 032H/L | 3.15A | ○ | | | ● | ● | | ● | ● | ● | | 3.2 |
| 035H/L | 3.5A | | | ● | ● | | | ● | ● | ● | | 4.2 |
| 040H/L | 4A | ○ | ● | ● | ● | | | ● | ● | ● | | 5.0 |
| 050H/L | 5A | ○ | | | ● | ● | | ● | ● | ● | | 7.2 |
| 060H/L | 6A | | | ● | ● | | | ● | ● | ● | | 7.7 |
| 063H/L | 6.3A | | | ● | ● | | | ● | ● | ● | | 7.9 |
| 070H/L | 7A | | | ● | ● | | | ● | ● | ● | | 9.4 |
| 080H/L | 8A | | | ● | ● | | | ● | ● | ● | | 13.4 |
| 090H/L | 9A | | | ● | ● | | | ● | ● | ● | | 16.9 |
| 100H/L | 10A | | | ● | ● | | | ● | ● | ● | | 24.2 |
| 120L | 12A | | | | ● | ● | | | ● | ● | | 35.6 |
| 150L | 15A | | | | ● | ● | | | ● | ● | | 56.8 |
| 200L | 20A | | | | ● | ● | | | ● | ● | | 115 |

H DENOTES FOR 250V (H表示250V)

L DENOTES FOR 125V (L表示125V, 100mA-10A)

L DENOTES FOR 72V (L表示72V, 12A-15A)

L DENOTES FOR 60V (L表示60V, 20A)

● DENOTES FOR APPROVED (●表示已取得认证)

○ DENOTES FOR PENDING (○表示申请中)

分断电流:

INTERRUPTING RATING:

50 amperes at 125V AC (100mA-3A)

50 amperes at 250V AC (375mA-3A)

30 amperes at 125V AC (3.15A-10A)

30 amperes at 250V AC (100mA-350mA, 3.15A-10A)

30 amperes at 72V AC (12A-15A)

50 amperes at 60V DC (20A)

电气特性 ELECTRICAL CHARACTERISTICS:

| 额定 RATING | 熔断时间 BLOWING TIME |
|-----------|---------------------|
| 100% | 4 hours Min (最快4小时) |
| 200% | 20 sec Max (最慢20秒) |