



20T  $2.4\phi \times 7$

超小型保险丝管(延时型) MICROFUSE (SLOW-BLOW)

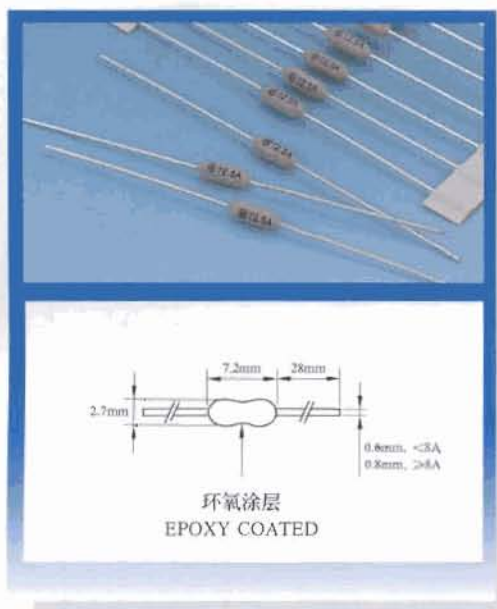

I-T CHARACTERISTICS CURVE  
电流-时间曲线图

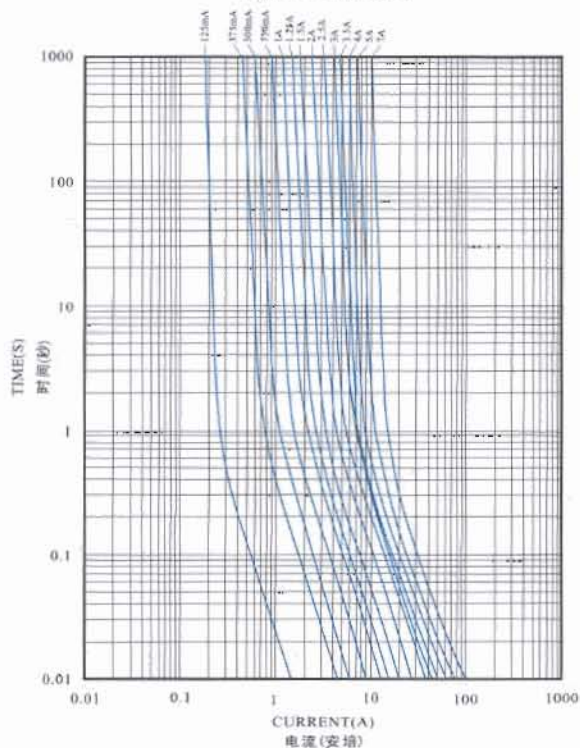

| 目录编号<br>CATALOG NO. | 额定电流<br>AMPERE RATING | 认证 APPROVALS |   |    |   |     |   | I <sup>2</sup> T<br>参考值<br>REFERENCE<br>(A <sup>2</sup> .S) |     |
|---------------------|-----------------------|--------------|---|----|---|-----|---|-------------------------------------------------------------|-----|
|                     |                       | CCC          |   | UR |   | CSA |   |                                                             | PSE |
|                     |                       | H            | H | L  | H | L   | L |                                                             |     |
| 0100H/L             | 100mA                 | ●            | ● | ●  | ● | ●   |   | 0.01548                                                     |     |
| 0125H/L             | 125mA                 |              | ● | ●  | ● | ●   |   | 0.02380                                                     |     |
| 0150H/L             | 150mA                 |              | ● | ●  | ● | ●   |   | 0.03530                                                     |     |
| 0160H/L             | 160mA                 |              | ● | ●  | ● | ●   |   | 0.04073                                                     |     |
| 0200H/L             | 200mA                 | ●            | ● | ●  | ● | ●   |   | 0.06272                                                     |     |
| 0250H/L             | 250mA                 | ●            | ● | ●  | ● | ●   |   | 0.098                                                       |     |
| 0300H/L             | 300mA                 |              | ● | ●  | ● | ●   |   | 0.128                                                       |     |
| 0315H/L             | 315mA                 | ●            | ● | ●  | ● | ●   |   | 0.151                                                       |     |
| 0350H/L             | 350mA                 |              | ● | ●  | ● | ●   |   | 0.194                                                       |     |
| 0375H/L             | 375mA                 |              | ● | ●  | ● | ●   |   | 0.211                                                       |     |
| 0400H/L             | 400mA                 |              | ● | ●  | ● | ●   |   | 0.341                                                       |     |
| 0500H/L             | 500mA                 | ●            | ● | ●  | ● | ●   |   | 0.467                                                       |     |
| 0600H/L             | 600mA                 |              | ● | ●  | ● | ●   |   | 0.641                                                       |     |
| 0630H/L             | 630mA                 | ●            | ● | ●  | ● | ●   |   | 0.783                                                       |     |
| 0750H/L             | 750mA                 |              | ● | ●  | ● | ●   |   | 0.933                                                       |     |
| 0800H/L             | 800mA                 | ●            | ● | ●  | ● | ●   |   | 0.135                                                       |     |
| 010H/L              | 1A                    | ●            | ● | ●  | ● | ●   | ● | 1.85                                                        |     |
| 012H/L              | 1.2A                  |              | ● | ●  | ● | ●   | ● | 2.30                                                        |     |
| 013H/L              | 1.25A                 | ●            | ● | ●  | ● | ●   | ● | 2.68                                                        |     |
| 015H/L              | 1.5A                  |              | ● | ●  | ● | ●   | ● | 4.23                                                        |     |
| 016H/L              | 1.6A                  | ●            | ● | ●  | ● | ●   | ● | 5.34                                                        |     |
| 020H/L              | 2A                    | ●            | ● | ●  | ● | ●   | ● | 8.24                                                        |     |
| 025H/L              | 2.5A                  | ●            | ● | ●  | ● | ●   | ● | 12.86                                                       |     |
| 030H/L              | 3A                    |              | ● | ●  | ● | ●   | ● | 18.41                                                       |     |
| 032H/L              | 3.15A                 |              | ● | ●  | ● | ●   | ● | 15.53                                                       |     |
| 035H/L              | 3.5A                  | ●            | ● | ●  | ● | ●   | ● | 22.24                                                       |     |
| 040H/L              | 4A                    | ●            | ● | ●  | ● | ●   | ● | 30.42                                                       |     |
| 050H/L              | 5A                    | ●            | ● | ●  | ● | ●   | ● | 56.38                                                       |     |
| 060H/L              | 6A                    |              | ● | ●  | ● | ●   | ● | 83.42                                                       |     |
| 063H/L              | 6.3A                  | ●            | ● | ●  | ● | ●   | ● | 90.79                                                       |     |
| 070H/L              | 7A                    |              | ● | ●  | ● | ●   | ● | 105.46                                                      |     |

H DENOTES FOR 250V (H表示250V)

L DENOTES FOR 125V (L表示125V)

● DENOTES FOR APPROVED (●表示已取得认证)

分断电流:

INTERRUPTING RATING:

30 amperes at 125V AC (100mA-7A)

30 amperes at 250V AC (100mA-7A)

电气特性 ELECTRICAL CHARACTERISTICS:

| 额定 RATING | 熔断时间 BLOWING TIME        |
|-----------|--------------------------|
| 100%      | 4 hours Min (最快4小时)      |
| 200%      | 1-60sec (1-60 秒)         |
| 300%      | 0.2-3sec (0.2-3 秒)       |
| 800%      | 0.02-0.1sec (0.02-0.1 秒) |