
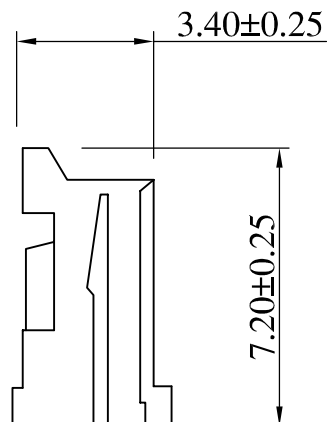
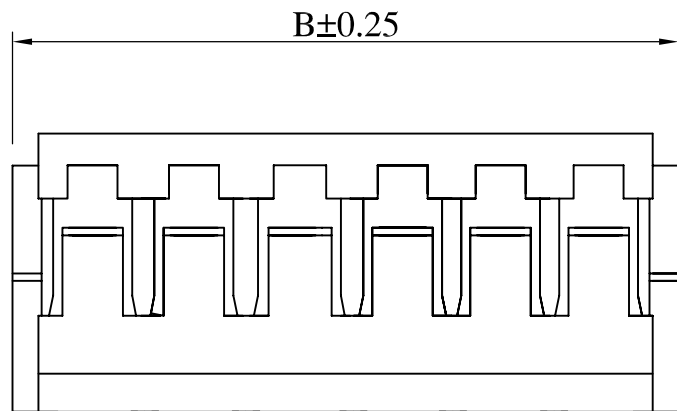


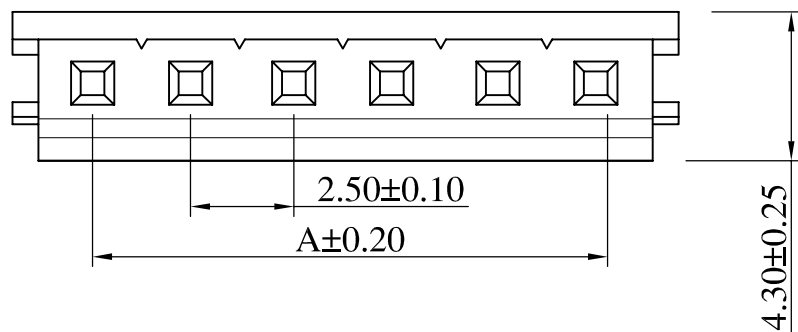

SPECIFICATIONS

Current rating : 2.5A AC,DC

Voltage rating : 250V AC,DC

Temperature range : -25°C to +85 °C

Contact resistance : 10mΩ Max.

Insulation resistance : 1000MΩ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-0

Ordering Information & Dimensions

Poles	Part No.	Dimension (mm)	
		A	B
2	250G1-H02	2.50	7.00
3	250G1-H03	5.00	9.50
4	250G1-H04	7.50	12.00
5	250G1-H05	10.00	14.50
6	250G1-H06	12.50	17.00
7	250G1-H07	15.00	19.50
8	250G1-H08	17.50	22.00
9	250G1-H09	20.00	24.50
10	250G1-H10	22.50	27.00
11	250G1-H11	25.00	29.50
12	250G1-H12	27.50	32.00
13	250G1-H13	30.00	34.50
14	250G1-H14	32.50	37.00
15	250G1-H15	35.00	39.50

Rev	Description/Date	Drawn By: Storm.li	Customer:		Third angle projection			X.± .X±0.30
		Checked By:Simmon	Part No.: 250G1-HXX		General Dimension Tolerance	Units: mm		.XX±0.20
		Approved By: Tony						.XXX±0.10
SGS Report No.:CE/2005/62993D			Title:	2.50mm Wire to Board Housing				