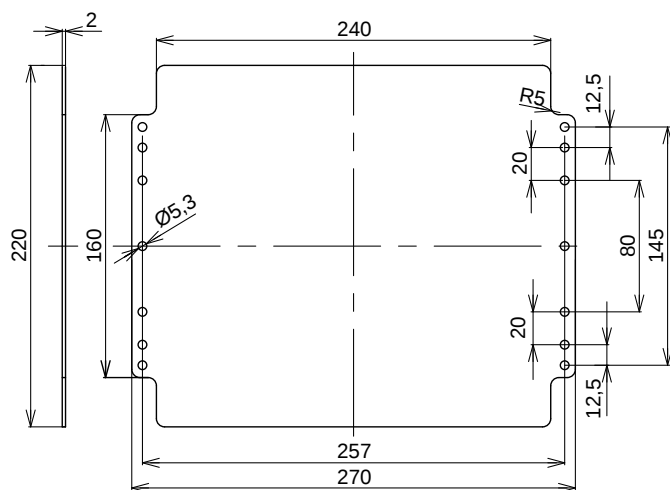




Model <i>Modello</i>	28.23.11	Outside dimensions <i>Dimensioni esterne</i>	280 x 230 x 110 mm	Type/Color <i>Tipo/Colore</i>	Part No. <i>Codice</i>
				STD - Grey/ <i>Grigio</i> RAL 7001	8100.8024.0
				STD - Light grey/ <i>Grigio</i> RAL 7035	8100.8124.0
				Sandblasted/Aluminium <i>Sabbiata/Alluminio</i>	8100.8224.0
				Not painted <i>Non verniciata</i>	8100.8224.5
				STD - Black/ <i>Nero</i> RAL 9005	8100.8324.1
				HT - Black/ <i>Nero</i> RAL 9005 For high temperature <i>Per alte temperature</i>	8100.8324.H
				Ex ATEX - Grey/ <i>Grigio</i> RAL 7001	8100.8024.7
CE RoHS - IP66 / IP69 (EN 60569) - NEMA 250 / <i>NEMA 250</i>: Type 4,4x,12,13 for enclosures types STD - HT Type 4,12,13 for sandblasted enclosures, <i>per cassette sabbiata</i> - Packing / <i>Imballo</i>: 1 - For dedicated DIN rails and accessories see page: 03.85 - 03.88 <i>Per guide DIN dedicate ed accessori vedere pag:</i>					
Metal plate - <i>Piastra di fondo</i>				Finishing <i>Finitura</i>	Part No. <i>Codice</i>
				Zinc-plated steel <i>Acciaio zincato</i>	8100.8424.0

Model
Modello

28.23.11

Outside dimensions
Dimensioni esterne

280 x 230 x 110 mm

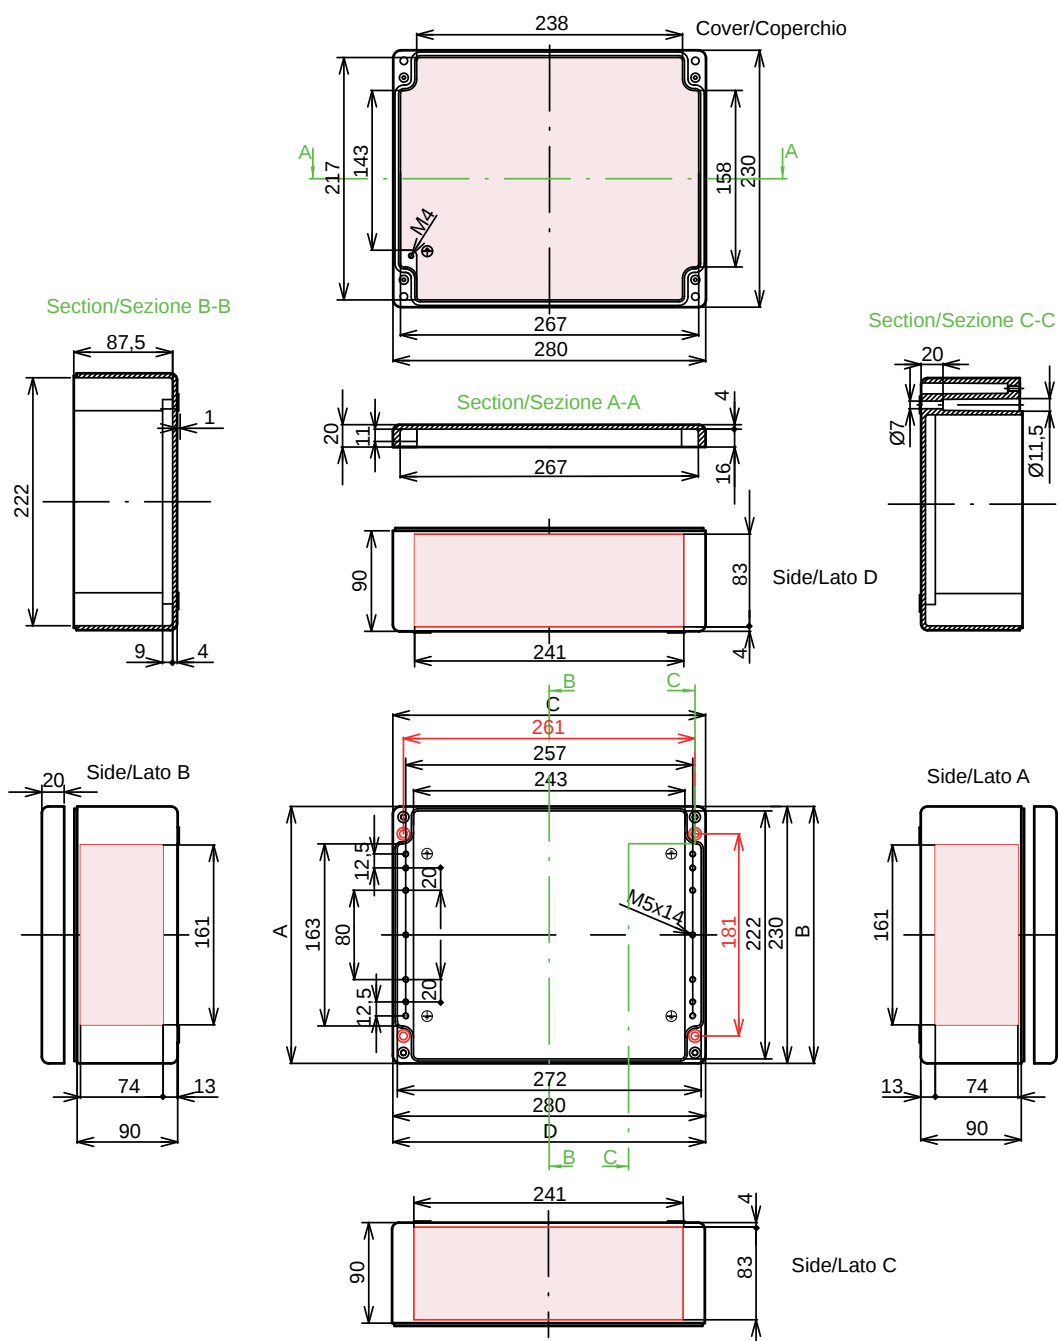

Panel drillings for installation:
Forature del pannello per l'installazione:

The pink color identifies the allowed zones for drilling and threading operations.

Upon request, we supply drilled enclosures with or without cable glands and fittings according customer's requirements.

Il colore rosa indica le zone libere per operazioni di foratura e filettatura.

Possiamo fornire cassette forate con o senza pressacavi e raccordi secondo il disegno del cliente

ATEX - MAX M/Pg Thread - Massima filettatura M/Pg

M	12	16	20	25	32	40	50	63		
Side A/B	22	10	8	4	2	2				
Lato A/B	22	10	8	4	2	2				
Side C/D	52	26	18	11	5	4	3			
Lato C/D	52	26	18	11	5	4	3			
Pg	7	9	11	13.5	16	21	29	36	42	48
Side A/B	22	15	10	8	7	4	2	2		
Lato A/B	22	15	10	8	7	4	2	2		
Side C/D	52	33	23	18	14	10	5	4	3	
Lato C/D	52	33	23	18	14	10	5	4	3	