
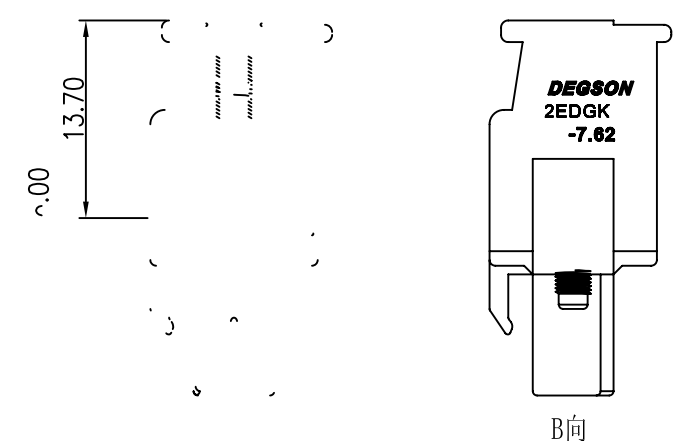


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		料号变更:由S000001370变更为S000000980	Yangjs	01.12.07*
△		品名、料号增加环保标示“(H)”	LJH	12/11/07*
△		增加VDE刻字	WLM	11/19/08*

Notes:

- Pitch:7.62mm, Poles:2-12P
- Rated voltage/current : UL 300V/15A  
VDE 400V/10A
- Operation temperatures : -40° C~+105° C
- Insulation resistance: 5000MΩ/DC1000V
- Withstanding voltage : AC2000V/1Min
- Wire Range:28-12AWG , 2.5mm<sup>2</sup>
- Max. Torque Value:M2.5, 4.08kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10 to 24	24 to 30	30 to 60	60 to 100	100 to 150	150	∩
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
								0.05/10

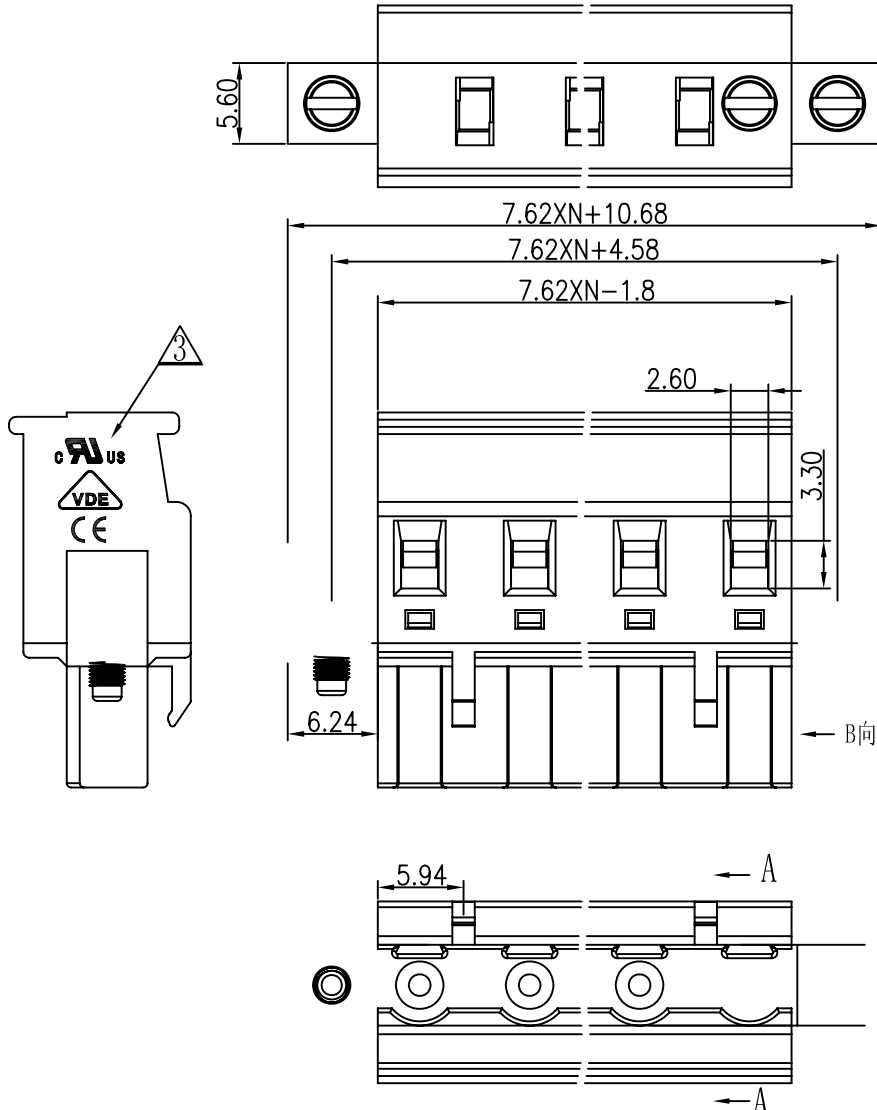

5	2EDGKA-7.62 Cover	1053COYXXA(H)	1	PA66	UL94V-0
4	2EDGKA-Clamp	1028B00010(H)	XX	Phosphor bronze	Ni plated
3	2EDGK Screw"-M2.5	△ S000000980(H)	XX+2	Steel	Cr <sup>3+</sup> Zn
2	DG128 CAGE	X000000020(H)	XX	Brass	Ni plated

1	2EDGKAM-7.62 housing	1084AOYXXA(H)	1	PA66	UL94V-0	
ITEM NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Zhuwm	DATE 09/27/06*	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
MM (INCH)		CHKD	DATE	NAME		
MM		MFO	DATE	2EDGKAM-7.62-XXP-1Y-00A(H)		
.0 ±		APPL	DATE	DRAWING NO. 2EDGKAM-7.62-E01		
.00 ±		MATERIAL :		/PART NO.		
.000 ±		G.E :		SIZE A3		
ANGLES ± 1°		FINISH :		REV T3		
THIRD ANGLE PROJECTION		SCALE : 1:1		11/19/08*		
DO NOT SCALE DRAWING				SHEET 1 OF 1		