

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Dielectric Voltage: 1000V AC/minute

ORDER INFORMATION

5 T 2 2 1 7 N - X

X X R M 0 1


P:Phosphor Bronze
B:Brass

T0:Tin Plated
GF:15u"

R:Tape&Reel



Thickness	Material	Finish	Wire Range	Insulation O.D
0.20	Brass	Tin-Plated	AWG#22~#28	1.50mm(Max.)
0.20	Phosphor bronze	Tin-Plated	AWG#22~#28	1.50mm(Max.)
0.20	Brass	15μ" gold over 50μ" nickel	AWG#22~#28	1.50mm(Max.)
0.20	Phosphor bronze	15μ" gold over 50μ" nickel	AWG#22~#28	1.50mm(Max.)

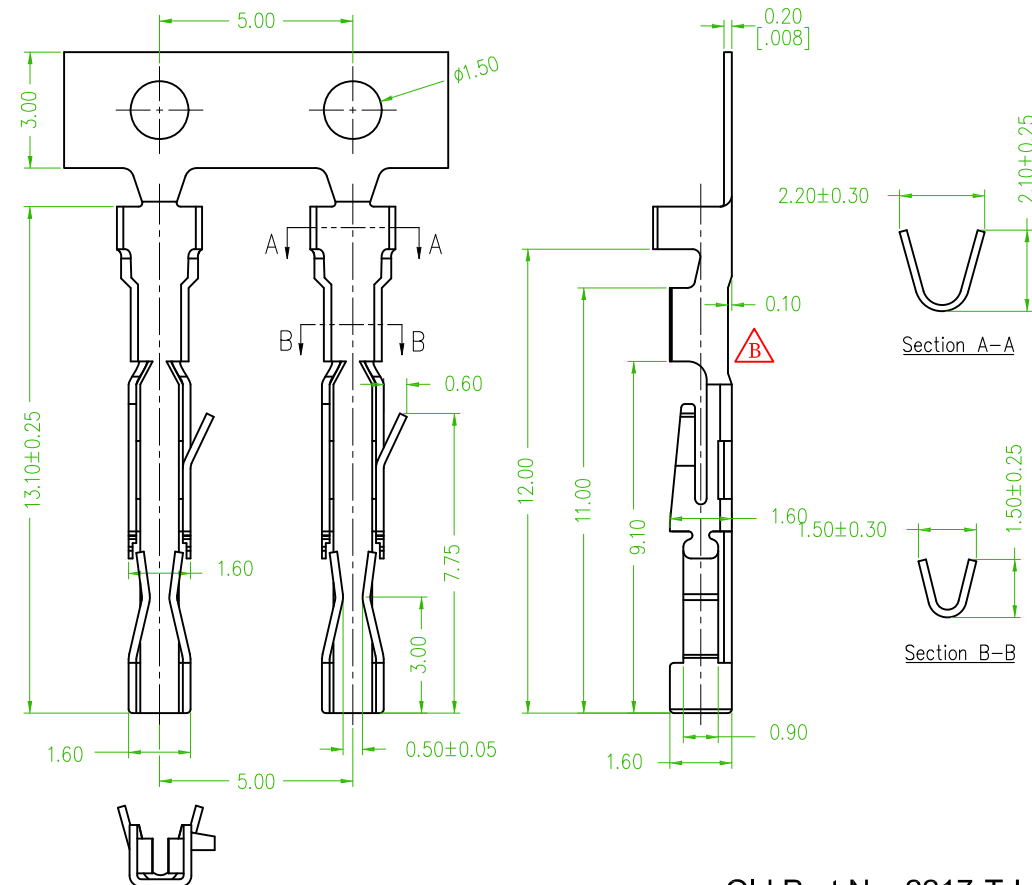

Old Part No.:2217-T-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B _{x1}	Revise the detail: structural reinforcement.	Gary	2017/07/07

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm TERMINAL				頁數 Page	1/1
	品號 PART NO.	5T2217N-XXXXRM01				繪圖 DRAWN	Jeff 2016/08/31
	圖號 DRAWING NO.	GN003-GA462	版本 REV.	B	核對 CHECKED	Johnny 2016/08/31	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/08/31	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		