


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		增加VDE, CE刻字	Zengy	07/22/08
△	0-0106	增加UL刻字	Lasting	06/15/10

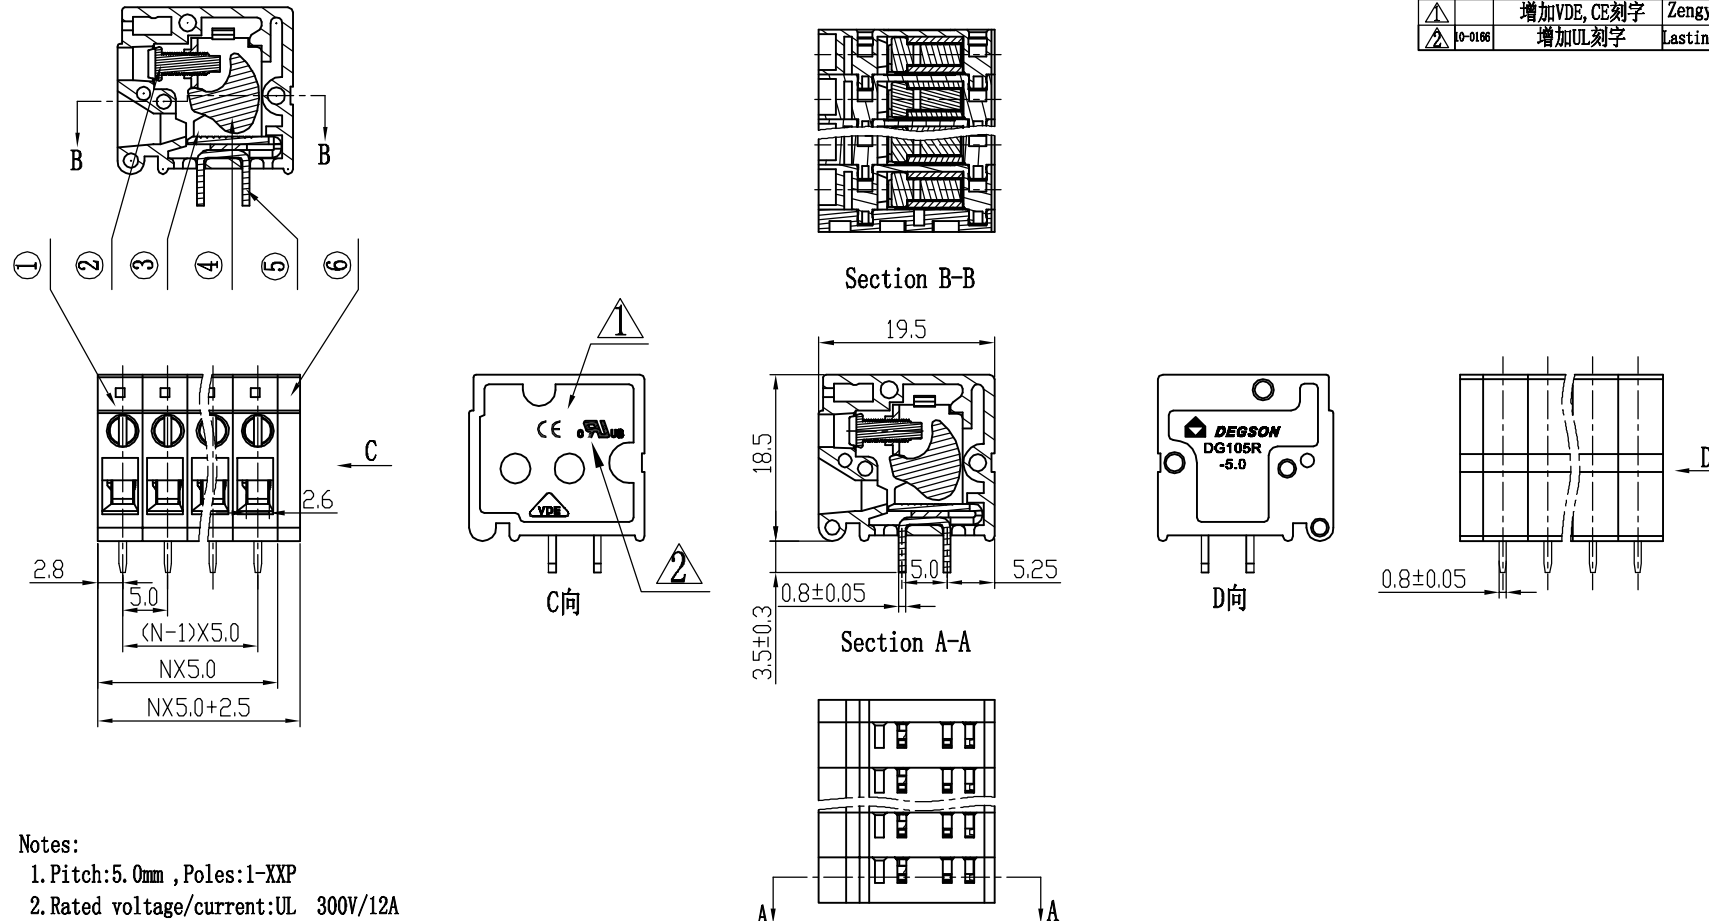

Notes:

- Pitch: 5.0mm, Poles: 1-XXP
- Rated voltage/current: UL 300V/12A
VDE 250V/24A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 30~12AWG, 0.5~2.5mm²
- Max. Torque Value: M2.5, 4.08Kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
	over 6	over 10	over 30	over 60	over 100	over 150	∩
to 6	to 10	to 24	to 30	to 60	to 100	to 150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
							0.05/10

6	DG105R-Cover	4090C0Y01A (H)	1	PA66	UL94V-0
5	DG105R-5.0-Pin header	4090B00010 (H)	XX	Copper	SnCu plated
4	2EDGKC-Block	X000001720 (H)	XX	Steel	Cr ³⁺ Zn
3	2EDGKC-Cage	X000001710 (H)	XX	Steel	Cr ³⁺ Zn
2	2EDGKC Screw-M2.5	S000002150 (H)	XX	Steel	Cr ³⁺ Zn

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG105R-5.0	4090A0Y01A (H)	XX	PA66	UL94V-0

DRFT Yangyis	DATE 12/28/06*	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
CHKD	DATE		
MFD	DATE		
APPVL	DATE		
TOLERANCES EXCEPT AS NOTED		MATERIAL :	
MM	±	NAME DG105R-5.0-XXP-1Y-00A (H)	
.0 ±	±		
.00 ±	±		
ANGLES ± 1°		G.E :	
THIRD ANGLE PROJECTION		FINISH:	
SCALE : 1:1		DRAWING NO. DG105R-E01	SIZE A3
DO NOT SCALE DRAWING		SHEET 1	REV T2 06/15/10