


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		增加VDE, CE刻字	Zengy	07/22/08
△	0-0166	增加UL刻字	Lasting	06/15/10

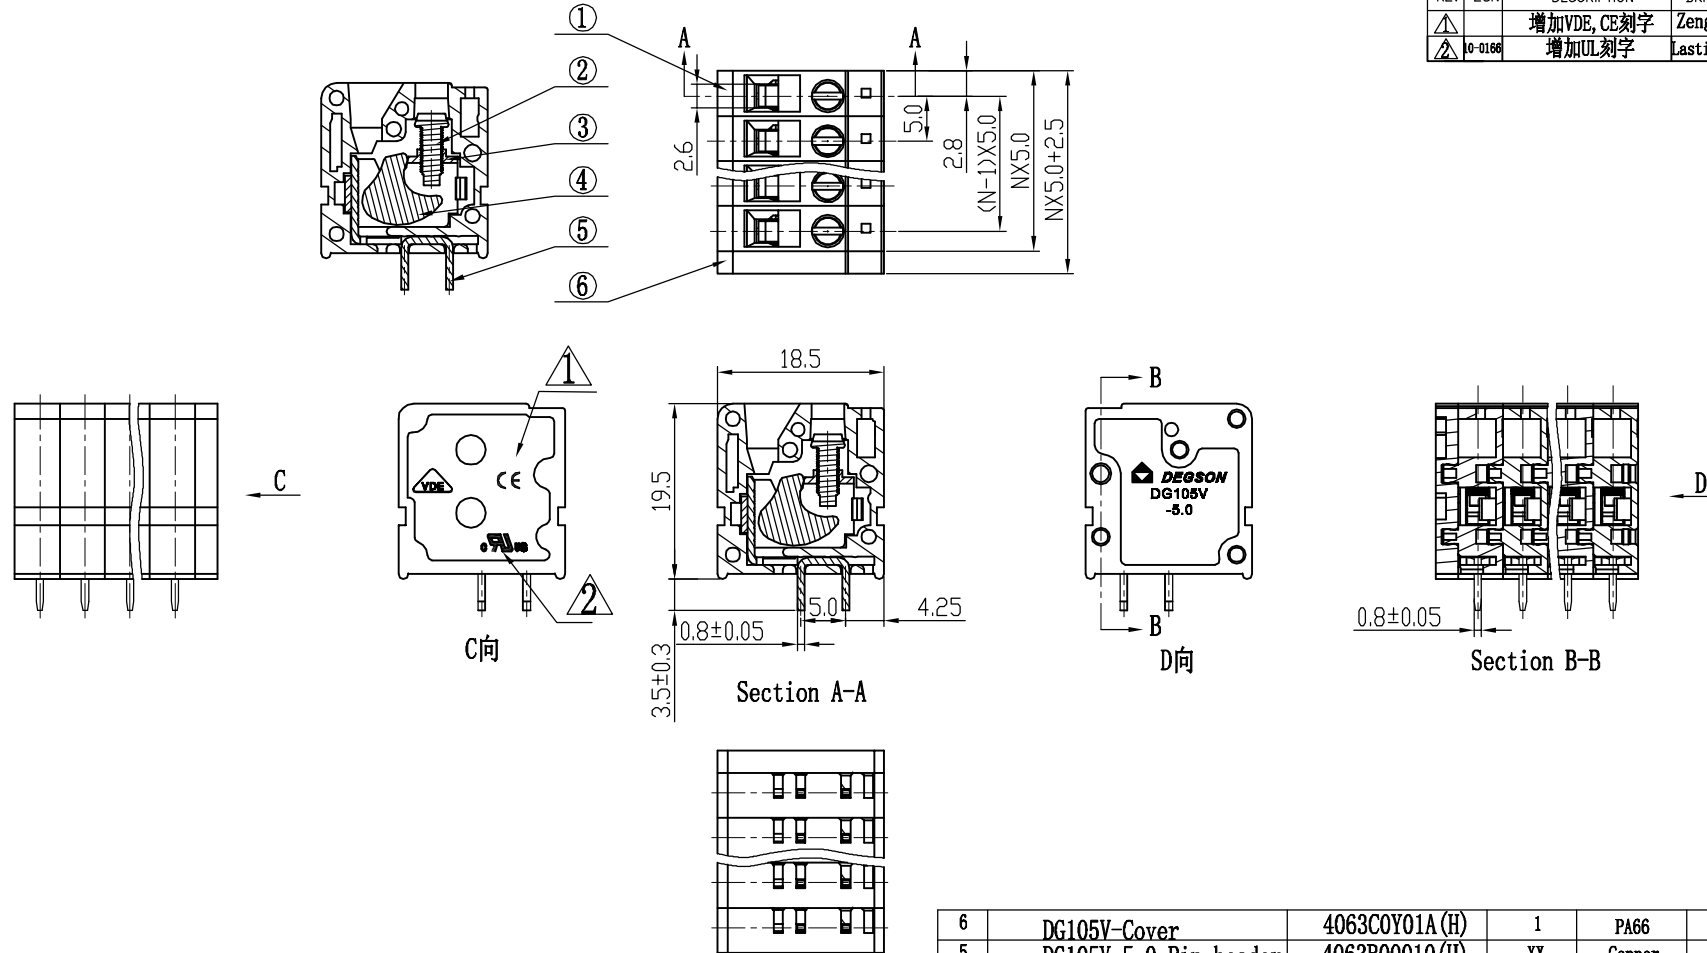

Notes:

- Pitch: 5.0mm, Poles: 1-XXP
- Rated voltage/current: UL 300V/12A
VDE 250V/24A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ / DC1000V
- Wire Range: 30~12AWG, 0.5~2.5mm²
- Max. Torque Value: M2.5, 4.08Kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

6	DG105V-Cover	4063C0Y01A (H)	1	PA66	UL94V-0
5	DG105V-5.0-Pin header	4063B00010 (H)	XX	Copper	SnCe plated
4	2EDGKC-Block	X000001720 (H)	XX	Steel	Cr ³⁺ Zn
3	2EDGKC-Cage	X000001710 (H)	XX	Steel	Cr ³⁺ Zn
2	2EDGKC Screw-M2.5	S000002150 (H)	XX	Steel	Cr ³⁺ Zn
1	DG105R-5.0	4063A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	DFTD Yangys	DATE 12/28/06	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG105V-5.0-XXP-1Y-00A (H)	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFD	DATE		
		APPVL	DATE		
	MM			DRAWING NO. DG105V-E01	
	.00 ±	±		/PART NO.	
	.000 ±	±		SIZE A3	
				REV T2	
	ANGLES ± 1°	G.E :		06/15/10	
	THIRD ANGLE PROJECTION	FINISH:		DO NOT SCALE DRAWING	
		SCALE : 1:1		SHEET 1 OF 1	