



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		工程变更	Hang	07/27/07*
△		商标去掉	LJH	09/04/07*
△		品名、料号增加环保标示“(0)”	LJH	12/08/07*
△		增加刻字	LJH	02/20/08*
△		按钮材质由PA66变更为POM	WLM	04/20/09*
△	10-0322	增加VDE刻字及修改参数	ZXX	09/28/10*

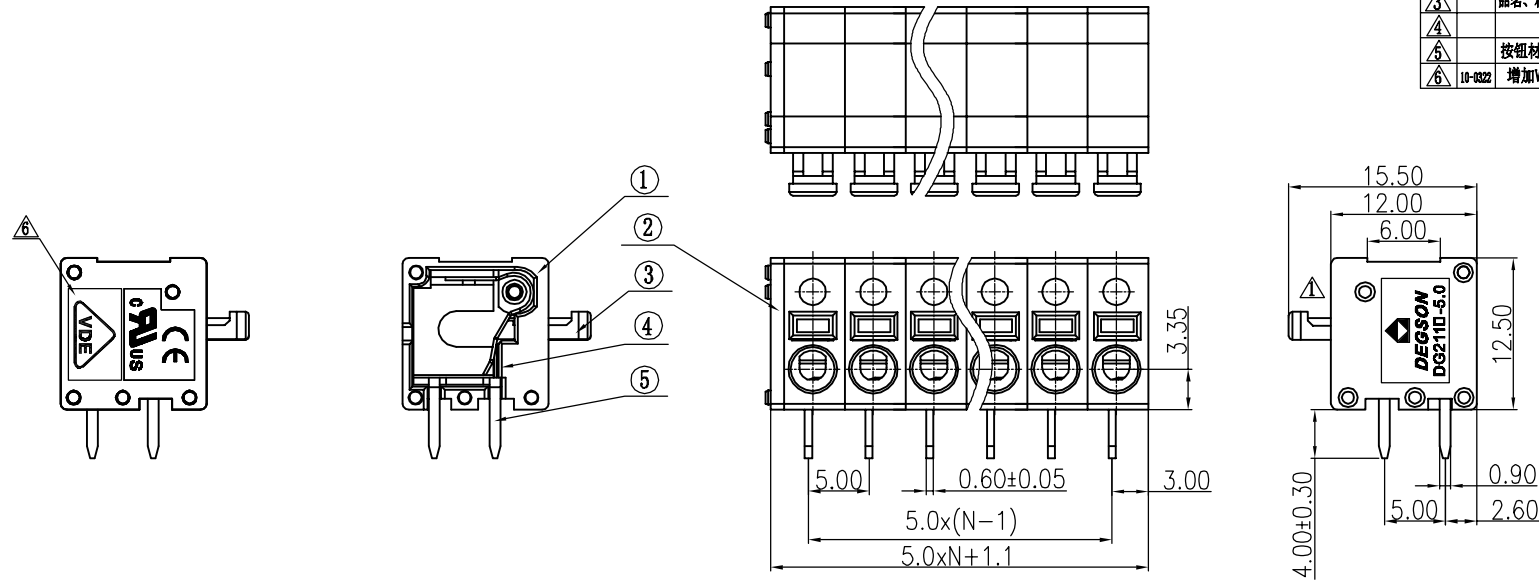

Notes:

1. Pitch: 5.0mm , Poles: XXP
2. Rated voltage/current: UL 300V/8A
VDE 250V/15A △
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2500V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 26~16AWG, 0.2~1.5mm² △
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10	over 30	over 60	over 100	over 150	—	
to 6	to 10	to 24	to 30	to 60	to 100	to 150	∩	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

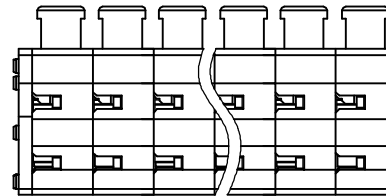

5	DG211R-5.0-Pin header	3034B00020 (H)	XX	Brass	SnCe Plated
4	DG211V/R-5.0-Spring	X000001360 (H)	XX	Stainless steel	
3	DG211V/R-5.0-Button	3034D0Y01A (H)	XX	POM △	UL94HB
2	DG211V/R-5.0-Cover	3034C0Y01A (H)	1	PA66	UL94V-0
1	DG211V/R-5.0-Housing	3034A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	DFTO Alon	DATE 05/18/06**	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
		MFO	DATE	
		APPVL	DATE	
	MM			NAME
	.0 ±	±		DG211R-5.0-XXP-1Y-00A(H)
	.00 ±	±		DRAWING NO. DG211R-5.0-E01
	.000 ±	±		/PART NO.
	ANGLES ± 1°	G.E. :		SIZE A3
	THIRD ANGLE PROJECTION	FINISH :		REV T6
		SCALE : 1:1		09/28/10*
				DO NOT SCALE DRAWING
				SHEET 1 OF 1