
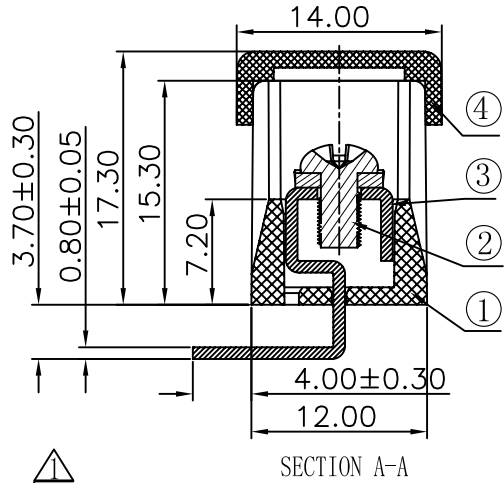


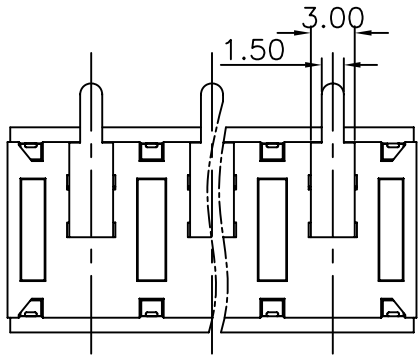
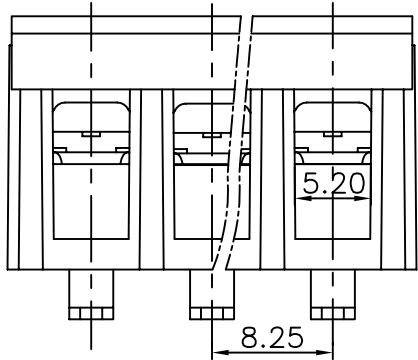


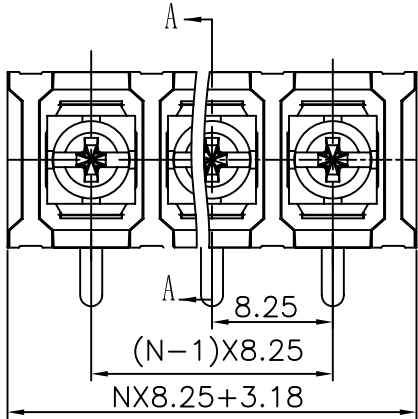


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	CSX	03/13/07
2		品名、料号增加环保标识“(H)”	YeJ	12/08/07

- Notes:
- 1. Pitch:8.25mm ,Poles:2-26P
 - 2. Rated current:15A
 - 3. Rated voltage:300V
 - 4. Operation temperatures:-40° C~+105° C
 - 5. Insulation Withstand Voltage:AC2000V/Min
 - 6. Insulation Resistance:500MΩ /DC500V
 - 7. Wire Range:22~14AWG
 - 8. Max. Torque Value:5.1kgf.cm
 - 9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	□

4	DG38-Cover	5050C07XXA (H)	1	PC	
3	DG28R Pin header	5006B00070 (H)	XX	Brass	SnCe plated
2	M3*6(6*6)bright Screws	S000000450 (H)	XX	Steel	Ni plated

1	DG38-B housing	5050A0YXXA (H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →		DFTO Zhuwm	DATE 12/28/05	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG38R-B-XXP-1Y-00A (H) DRAWING NO. DG38R-E02 /PART NO. DO NOT SCALE DRAWING
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE	
	MM .0 ± ± .00 ± ± .000 ± ±		MFO	DATE	
			APPVL	DATE	
			MATERIAL :		
	ANGLES ± 1°		G.E :		
	 THIRD ANGLE PROJECTION		FINISH :		
			SCALE : 1:1		
			SIZE A3		
	REV T2 12/08/07				
SHEET 1 OF 1					