


REVISION RECORD					
REV	ECD	DESCRIPTION	DRFT	DATE	
△		增加VDE、CE、UL刻字	HD	10/20/08	

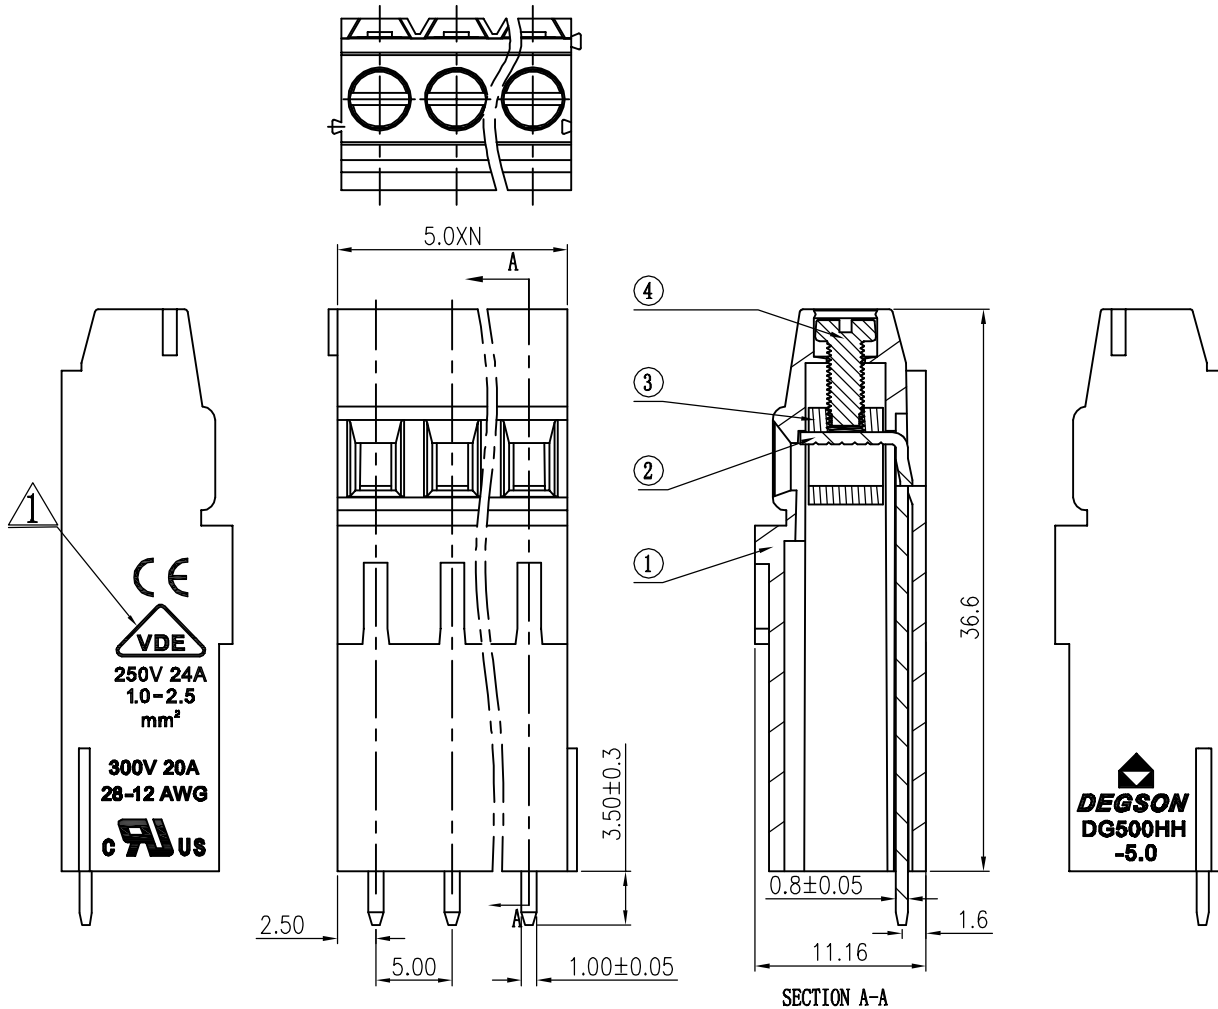

- Notes:
1. Pitch: 5.00mm , Poles:2-XXP
 2. Rated voltage/current:UL 300V/20A
VDE 250V/24A
 3. Insulation resistance: 5000MΩ/DC1000V
 4. Wstanding voltage: AC2000V/1min
 5. Wire range: 28-12AWG , 2.5mm²
 6. Temp. Range: -40° C~+105° C
 7. Torque: 4.08kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	10	10	24	30	60	100	150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	□

4	DG128 "—"Screws	S000001460 (H)	XX	Steel	Zinc plated
3	DG128 Wire guard	X000000020 (H)	XX	Brass	Ni plated
2	DG500HH-Pin header	4060B00010 (H)	XX	Barss	SnCe

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG500HH-5.0 Housing (H)	4059A0YXXA (H)		PA66	UL94V-0

DRFT	ZYH	DATE	10/25/08
CHKD		DATE	
MFD		DATE	
APPVL		DATE	
MATERIAL :			
G.E. :			
FINISH:			
SCALE : 1:1			

NAME		DG500HH-5.0-XXP-1Y-00A(H)	
DRAWING NO.		DG500HH-5.0-E01	
/PART NO.			
DO NOT SCALE DRAWING	SHEET 1	OF 1	