

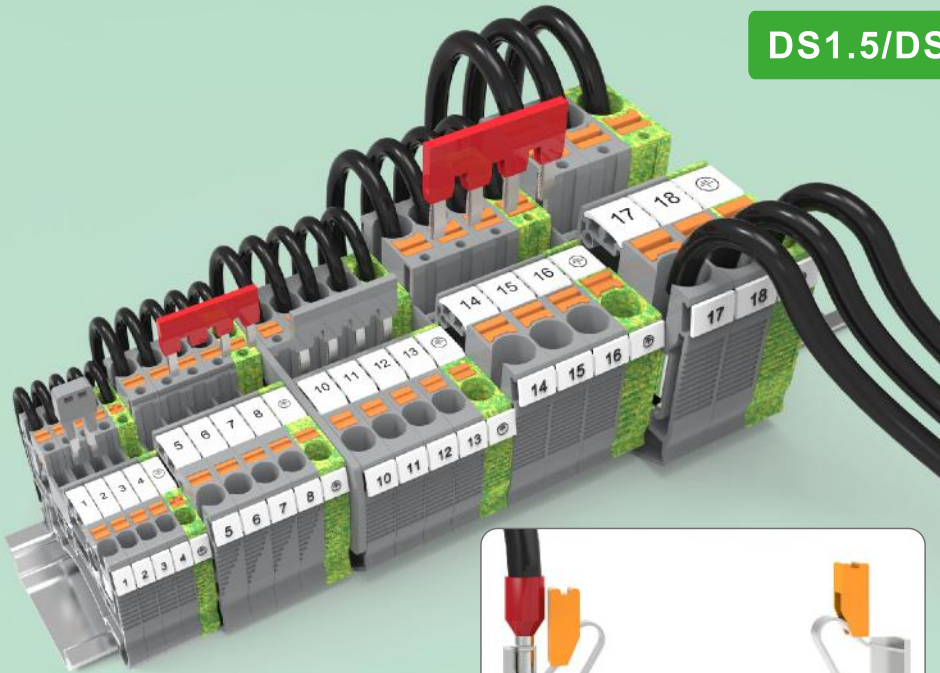
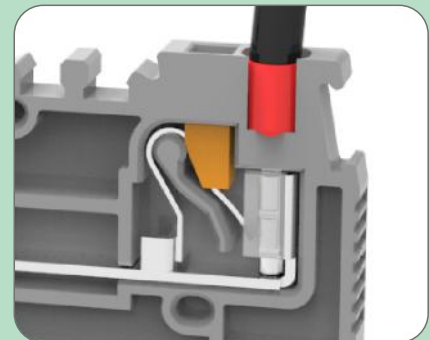


DS1.5/DS2.5/DS4/DS6/DS10/DS16

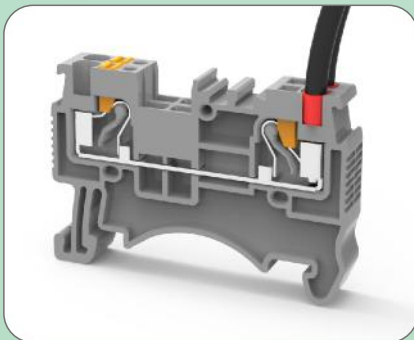

- Push-in 直插式连接技术, 操作更快捷;
- 蝶型弹簧结构, 抗振性能好;
- 插入式桥接附件, 提供02P-10P多种选择。
- Push-in connection technology, fast operation;
- Push-in spring structure, excellent vibration resistance;
- Plug-in Jumping Accessories; 02P-10P Available.

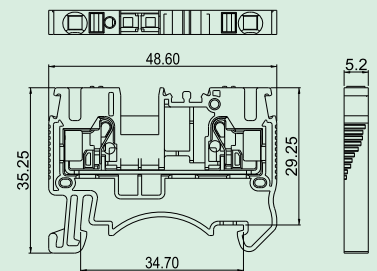

技术参数 Technical Data

APPROVAL: CE

型号 Model	线径 Wire range	线数 Poles	IEC60947技术参数 (IEC60947 datasheet)		UL1059技术参数 (UL1059 datasheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DS1.5	0.2-1.5mm ² /26-14AWG	1P	500	17.5	600	15
DS2.5	0.2-4mm ² /26-12AWG	1P	800	24	600	20
DS4	0.2-6mm ² /26-10AWG	1P	800	32	600	30
DS6	0.5-10mm ² /20-8AWG	1P	1000	41	600	40
DS10	0.5-16mm ² /20-6AWG	1P	1000	57	600	60
DS16	0.5-25mm ² /20-4AWG	1P	1000	76	600	85

型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
DS2.5	PT2.5	-

应用行业 Application


轨道交通、机械、电梯、电力电气等行业。
Railway transportation, machinery, elevator, electric power etc .



产品匹配 Counterparts

DFB1.5	DS1.5
DFB2.5	DS2.5
DFB4	DS4
DFB6	DS6
DFB10	DS10

产品订货 How to order

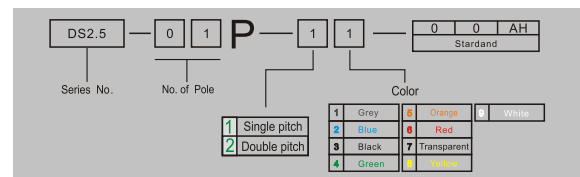

产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
DS1.5	50	DS1.5-PE	50
DS2.5	50	DS2.5-PE	50
DS4	50	DS4-PE	50
DS6	50	DS6-PE	50
DS10	50	DS10-PE	50
DS16	50	DS16-PE	50