

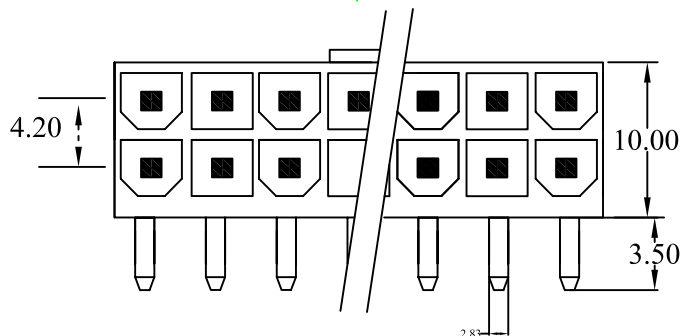




Circuits	2-3	4-6	7-10	12-24
A	9	8	7	6

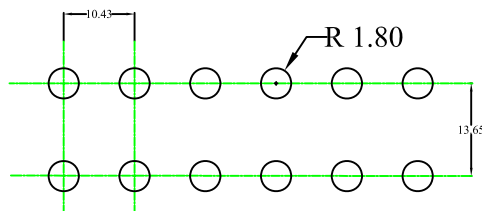

Mate with:WW420-M Series housing
Current rating:9A AC,DC Max
Voltage rating:600V ACDC
Contact resistance:10mΩMax
Insulation resistance:1000MΩMin
Withstanding voltage:1500V AC/Minute
Temperature range:-25°TO+85°

Poles	Part No	Dimensions(mm)	
		A	B
2	WW420-R02	5.40	
4	WW420-R04	9.60	4.20
6	WW420-R06	13.80	8.40
8	WW420-R08	18.00	12.60
10	WW420-R10	22.20	19.80
12	WW420-R12	26.40	21.00
14	WW420-R14	30.60	25.20
16	WW420-R16	34.80	29.40
18	WW420-R18	39.00	33.60
20	WW420-R20	43.20	37.80
22	WW420-R22	47.40	42.00
24	WW420-R24	51.60	46.20

Rev	Dexcripton/Date	Drawn By: Storm.li	Customer:		Third angle projection		Units: mm		
		Checked By:Simmon	Part No.:	WW420-RXX	Genral Dimenson Tolerance	X.X ±0.10	X.XX ±0.02	X.XXX ±0.01	
		Approved By: Tony							
SGS Report No.: KA/2005/40815/A-2			Title:	Mini-Fit Wafer					