



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	10-0025	工程变更, 更换螺丝	Zengy	02/01/10"
△	10-0356	更新图面	Golden	10/20/10"


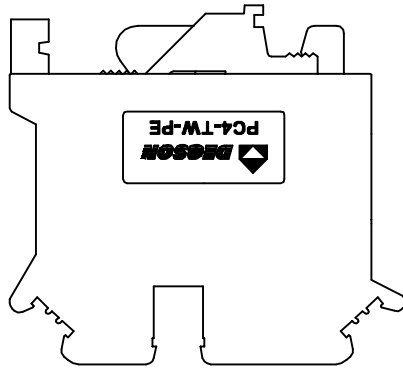


Notes:

1. Thickness/Width: 6.2/50.20mm
2. Wire Range: 24-14AWG, 0.2-4.0
3. Max. Torque Value: M3, 5.1kgf.cm
4. Strip length: 7-8mm
5. Operating temperatures: -40° C ~ +105° C
6. Undimensioned Tolerances:



Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	∩ ◇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

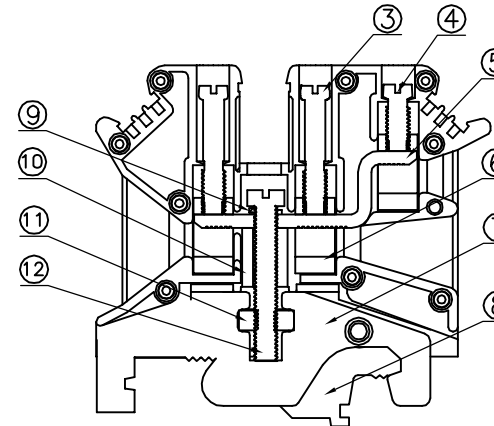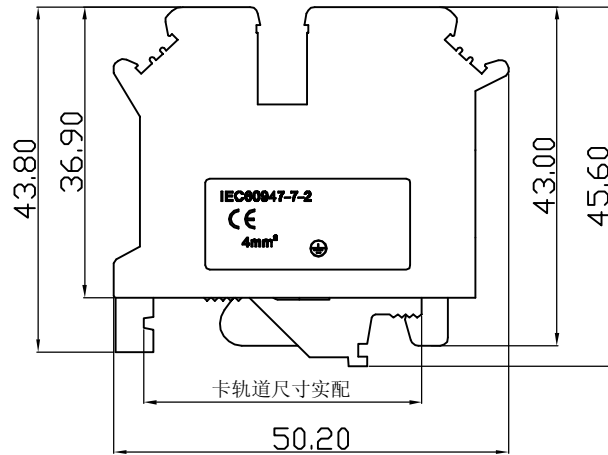

SECTION A-A

12	PC4-TW-PE M3 Adjusting bolt	S000004130(H)	1	Brass	Ni Plated
11	PC4-TW-PE Abnormity nut	S000004230(H)	1	Brass	Ni Plated
10	PC4-TW-PE Bar copper	X000003440(H)	1	Brass	Ni Plated
9	PC4-TW-PE Profile gasket	S000004240(H)	1	Spring Steel	Ni Plated
8	PC4-TW-PE Securing fitting	X000003730(H)	1	Brass	Ni Plated
7	PC2.5-PE Slip component	X000002090(H)	1	Iron	Cr <sup>3+</sup> Zn
6	PC4-Brass cage	X000000630(H)	3	Brass	Ni Plated
5	PC4-TW-PE Current carrier	6175B00010(H)	1	Copper	SnCe Plated
4	TSCB4 Screw	S000002530(H)	1	Brass	Ni Plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
3	PCDK2.5 M3"-Screw	S000002580(H)	2	Brass	Ni Plated
2	PC4-TW-PE-01P-18-00A(H) Housing1	6175A0801A(H)	1	PA66	UL94V-0
1	PC4-TW-PE-01P-14-00A(H) Housing2	6175A0401C(H)	1	PA66	UL94V-0

TOLERANCES EXCEPT AS NOTED .0 ± .00 ± .000 ±	MM (INCH)	DFTD ZYH	DATE 02/18/08'	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
		CHKD	DATE			
		MFD	DATE			
		APPLV	DATE			
ANGLES ± 1°		G.E		NAME PC4-TW-PE-01P-1Y-00A(H)		
THIRD ANGLE PROJECTION		FINISH:		DRAWING NO. PC4-TW-PE-E01	SIZE A4	REV T2
		SCALE: 1:1		/PART NO.	11/20/10"	
				DO NOT SCALE DRAWING	SHEET 1	OF 1

