







<b>APPROVAL</b>		
<b>Electrical</b>		
Standard	<b>UL</b>	<b>IEC</b>
Rated voltage	600V	450V
Rated current	65A	57A
Wire range	20-6AWG	0.2-10.0mm <sup>2</sup>
Withstanding voltage	AC3000V/1Min	
<b>Menchanical</b>		
Torque	1.2Nm(10.5Lb-In)	
Ambient temperature	-40℃~+105℃	
Strip length	12mm	
<b>Dimensions</b>		
pitch	10mm(.394")	
Poles	1P-XXP	
<b>Material</b>		
Housing	PA66,UL94V-0	
Screws	M4,Brass, Ni plated	
Pin header	Brass,Tin-plated	

### HOW TO ORDER :

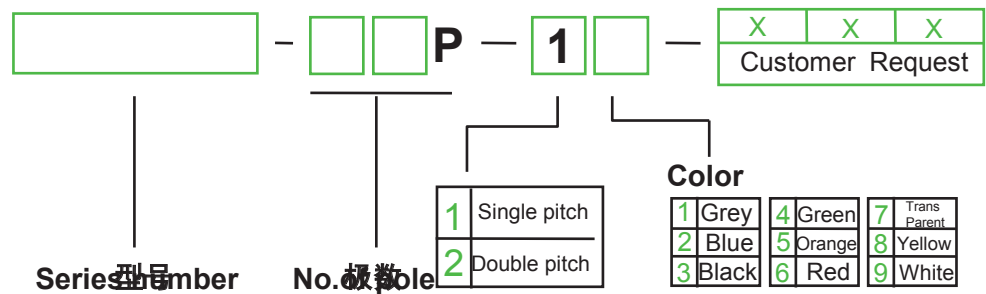

	 <b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>PS10</b>