


SPECIFICATION FOR APPROVAL

REF :




PAGE: 1

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SB1005□□□□L□-□□□
---------------	--------------------	-------------------------------------	------------------


CONFIGURATION & DIMENSIONS :

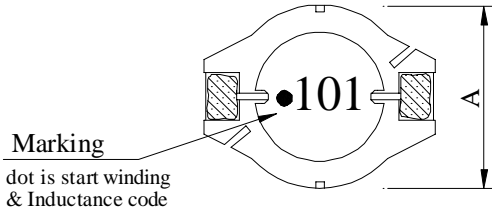

- A : 10.0±0.3 m/m
- B : 12.7±0.3 m/m
- C : 5.0±0.3 m/m
- D : 2.4±0.2 m/m
- E : 2.2 ref. m/m
- F : 7.6±0.3 m/m
- G : 7.3 ref. m/m
- H : 2.8 ref. m/m
- I : 3.0 ref. m/m




SCHEMATIC DIAGRAM :



MATERIALS :


- a . Core : Ferrite DR core
- b . Wire : Enamelled copper wire (class F)
- c . Base : LCP E4008
- d . Terminal : Cu/Ni/Sn
- e . Adhesive : Epoxy resin
- f . Solder wire : Sn97/Cu3 Alloys
- g . Remark : Products comply with RoHS' requirements

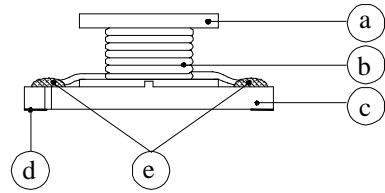

Peak Temp : 260 max.
Max time above 230 : 50sec max.
Max time above 200 : 70sec max.

GENERAL SPECIFICATION :

- a . Temp. rise : 15 typ.
- b . Storage temp. : -40 ~ +125
- c . Operating temp. : -40 ~ +105
- d . Resistance to solder heat : 260 . 10 secs.

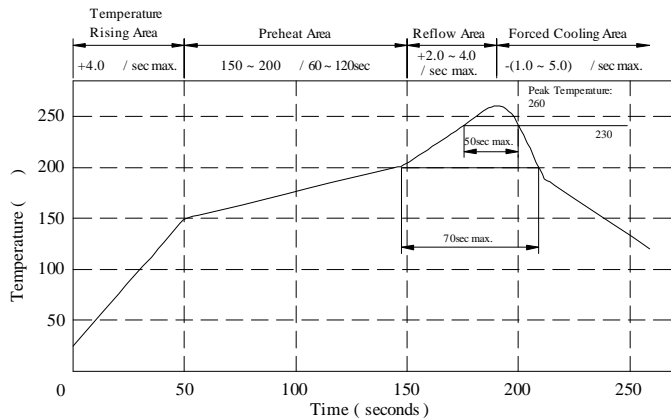

AR-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	


. ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (uH) 0.1 V / 100 KHz	RDC (Ω) max.	SRF (MHz) typ.	Irms (A) max.	Isat (A) max.
SB10051R0ML□-□□□	1.0±20%	0.007	130.0	7.50	9.00
SB10051R5ML□-□□□	1.5±20%	0.009	90.0	6.50	8.00
SB10052R5ML□-□□□	2.5±20%	0.012	65.0	5.50	7.00
SB10053R3ML□-□□□	3.3±20%	0.015	50.0	5.00	6.40
SB10054R7ML□-□□□	4.7±20%	0.019	45.0	4.50	5.40
SB10056R8ML□-□□□	6.8±20%	0.034	35.0	3.40	4.50
SB1005100ML□-□□□	10.0±20%	0.045	25.0	2.90	3.70
SB1005150ML□-□□□	15.0±20%	0.060	23.0	2.50	3.00
SB1005220ML□-□□□	22.0±20%	0.095	18.0	2.00	2.50
SB1005330KL□-□□□	33.0±10%	0.120	15.0	1.80	2.00
SB1005470KL□-□□□	47.0±10%	0.190	12.0	1.40	1.60
SB1005680KL□-□□□	68.0±10%	0.240	10.0	1.20	1.40
SB1005101KL□-□□□	100.0±10%	0.330	8.0	1.00	1.20
SB1005151KL□-□□□	150.0±10%	0.590	6.0	0.80	1.00
SB1005221KL□-□□□	220.0±10%	0.780	5.0	0.70	0.80
SB1005331KL□-□□□	330.0±10%	1.150	4.0	0.55	0.60
SB1005471KL□-□□□	470.0±10%	1.700	3.5	0.45	0.50
SB1005681KL□-□□□	680.0±10%	2.600	3.0	0.35	0.40
SB1005102KL□-□□□	1000.0±10%	3.900	2.0	0.30	0.30
SB1005152KL□-□□□	1500.0±10%	6.300	1.9	0.25	0.25
SB1005222KL□-□□□	2200.0±10%	8.200	1.6	0.20	0.20
SB1005332KL□-□□□	3300.0±10%	14.000	1.2	0.16	0.17
SB1005472KL□-□□□	4700.0±10%	17.000	1.1	0.15	0.15
SB1005682KL□-□□□	6800.0±10%	30.000	0.9	0.11	0.12
SB1005103KL□-□□□	10000.0±10%	39.000	0.7	0.10	0.10

1). □ : Packaging information ... Bulk Taping Reel

2)."- □□□":Reference code

AE-001A




SPECIFICATION FOR APPROVAL

REF :

PAGE: 3

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□
		ABC'S ITEM NO.	

. INDUCTANCE VS. DC CURRENT CURVE :

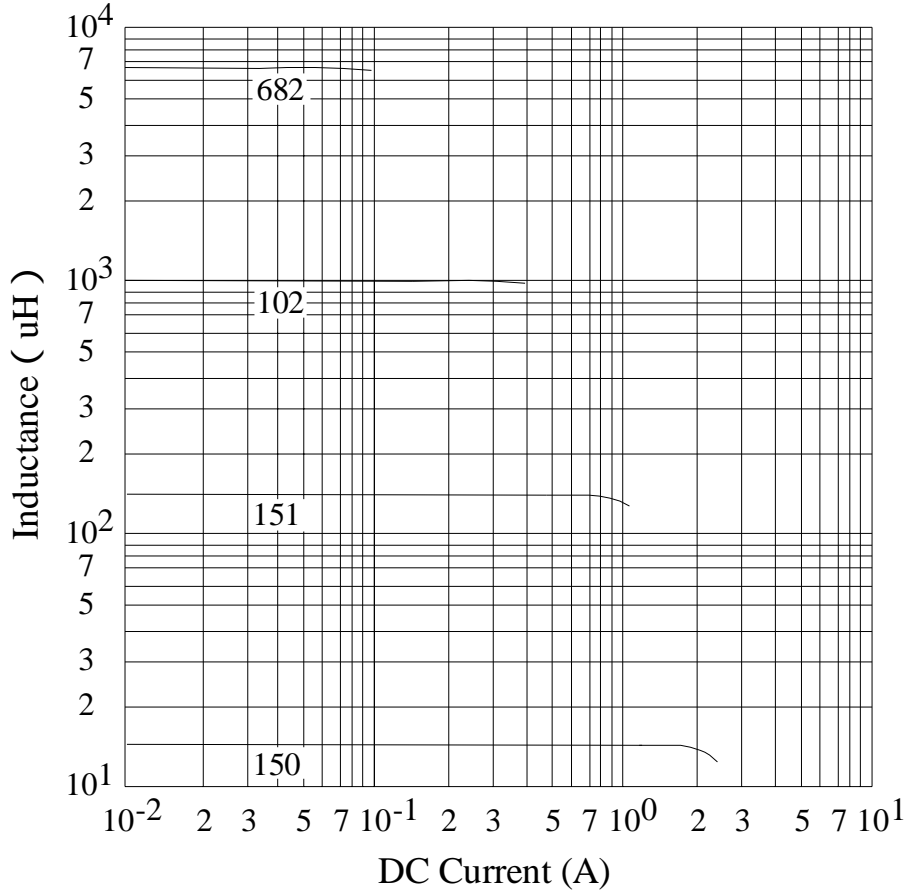

SPECIFICATION FOR APPROVAL



REF :

PAGE: 4

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

PACKAGING INFORMATION :

1. Configuration :

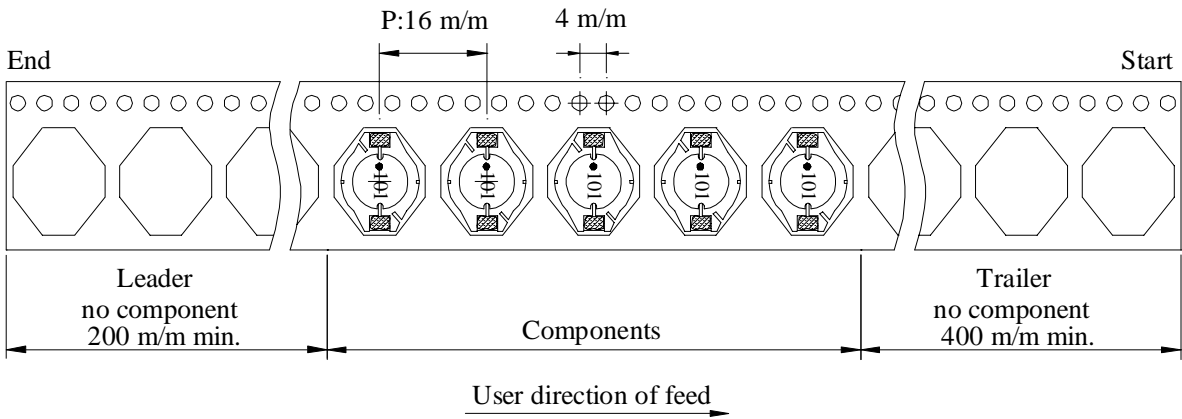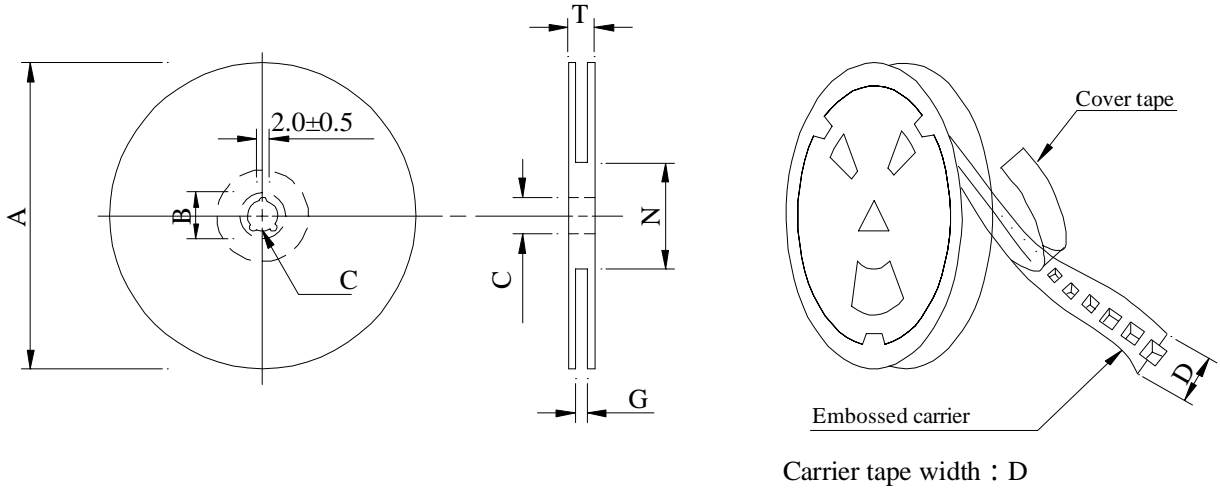

2. Dimensions : (m/m)

Style	A	B	C	D	G	N	T
13 - 24	330	21±0.8	13±0.5	24	26 ⁺⁰	50 ⁻⁰	30.4

3. Q'TY & G.W. Per package :

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (kg)	Size (cm)
SB1005	600	1100	13 - 24	2400	6.6	40 x 40 x 24


SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

. DWGING NUMBER EXPRESSION :

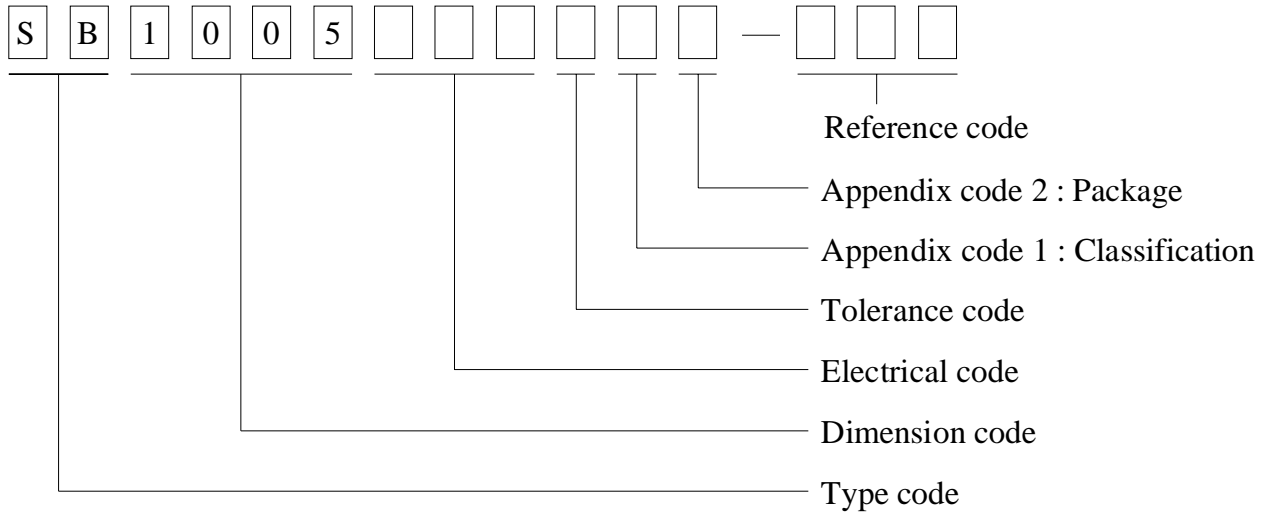

Appendix code 1 : Product Classification

- L : Lead Free Standard products comply with RoHS' requirements
- 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R (Reel package)	600 pcs	

AE-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 6

PROD. NAME	SMD POWER INDCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

. RELIABILITY TEST :

Test item	Specification	Test condition						
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25 for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5 Flux : Rosin Dip time : 4±1 seconds						
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">$\frac{-25\pm 2}{30 \text{ minutes}}$</td> </tr> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">$\frac{85\pm 2}{30 \text{ minutes}}$</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	$\frac{-25\pm 2}{30 \text{ minutes}}$	Room temp. 15 minutes	→	$\frac{85\pm 2}{30 \text{ minutes}}$
Room temp. 15 minutes		→	$\frac{-25\pm 2}{30 \text{ minutes}}$					
Room temp. 15 minutes		→	$\frac{85\pm 2}{30 \text{ minutes}}$					
Humidity Resistance test		Temperature : 40±2 Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours						
High temp. Resistance test	Temperature : 105±2 Applied current : Per spec. Time : 500 hours							

AE-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 7

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□
		ABC'S ITEM NO.	

UL CARD :

OBMW2 September 8, 2000
Magnet Wire-Component
JUNG SHING WIRE CO LTD E174837
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide	---	---	MW81-C	220
CFUEWB	---	Polyurethane	---	---	MW75C	130
EIAIW	---	Polyesterimide	---	Polyamideimide	MW35C	200
EILOCKY	---	Polyesterimide	---	Polyamide	---	180
EILOCKW	---	Polyesterimide	---	Modified Epoxy	---	200
EIW	---	Polyesterimide	---	---	---	220
EIW-2	---	Polyesterimide	---	---	MW74-C	200
FL.EILOCKY	---	Modified Polyester	---	Polyamide	---	155
LSFFW	---	Polyurethane	---	---	MW79-C	155
LSUEW	---	Polyurethane	---	---	---	130
PEW	---	Polyester	---	---	---	155
PEY	---	Polyester	---	Nylon	MW24-C	155
SF.FLW	---	Modified Polyester	---	---	MW26C	155
SF.EIW	---	Polyesterimide	---	---	MW77C	180
SF.BY@	---	Modified Polyester	---	Nylon	MW27-C	155
SF.FLY@	---	Modified Polyester	---	Nylon	MW27-C	155
SF.BLOCKBS	---	Modified Polyester	---	Modified Polyamide	---	155
SF.EILOCKY#	---	Polyesterimide	---	Polyamide	---	180
SF.EILOCKBS	---	Polyesterimide	---	Modified Polyamide	---	180
SF.BW@	---	Modified Polyester	---	---	MW26C	155
SFFW	---	Polyurethane	---	---	MW79	155

287806002 Page 1 of 2

A not-for-profit organization dedicated to public safety and committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane	---	Polyamide	MW80C	155
UEW-1	---	Polyurethane	---	---	MW2-C	105
UEW-2	---	Polyurethane	---	---	---	130
UEW-4	---	Polyurethane	---	---	MW75C	130
UEY	---	Polyurethane	---	Nylon	MW28-C	130
UEY-2	---	Polyurethane	---	Polyamide	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.
LZ - Signifies magened wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks or 榮星電線, material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002 Page 2 of 2

OBMW2/E174837
September 8, 2000

SPECIFICATION FOR APPROVAL

REF :

PAGE: 8

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

SUMITOMO CHEMICAL CO LTD										E54705 (M)		
5-33 KITAHAMA 4-CHOME CHUO-KO, OSAKA JAPAN												
Mtl Dsg	Col	Min Thk mm	UL94 Flame Class	Elec	RTI		w/o Imp	H W I	H A I	H V T R	D 4 9 5	C T I
					with Imp	Mech						
Liquid crystal polyester (LCP), designated "EKONOL" or "SUMIKASUPER", furnished in the form of pellets, (Contd)												
E4008, E400X	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4	—
E4008	NC, WT, BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4	—
E4010	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4	—
E400(Y)L, E4008L	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4	—
E4810	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	130	130	130	0	4	—	—	—	—
		1.5	94V-0	130	130	130	0	4	—	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4	—

(X) Denotes any number 1 thru 9.
(Y) Denotes any number 1 thru 7.

AE-001A

