
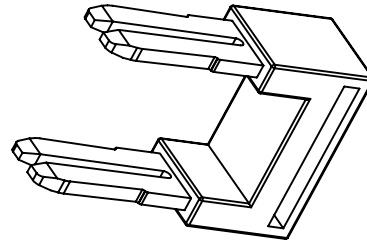





REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE



Notes:

- Rated voltage/current:UL 1059 600V/30A
IEC 800V/41A
- Operation temperatures:-40°C~+105°C
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—	
to 6	over 6 to 10	over 10 to 24	over 30 to 30	over 60 to 60	over 100 to 100	over 150 to 150	∩	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	□

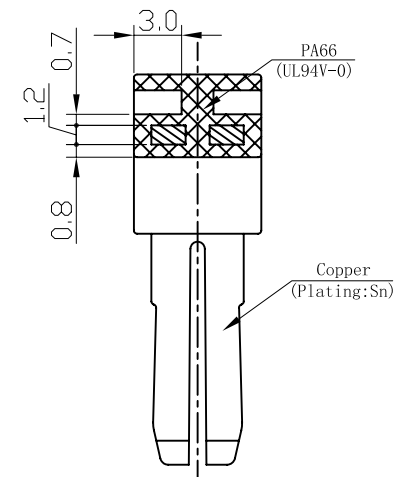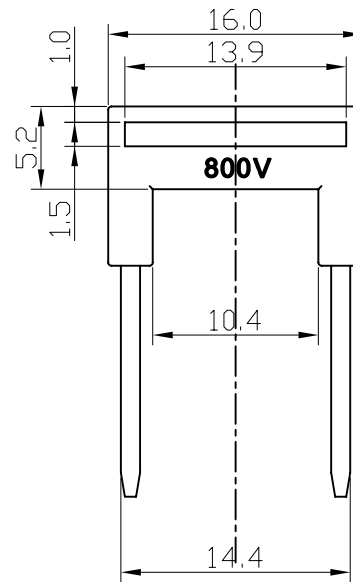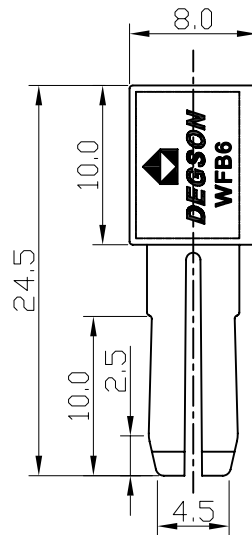

1	WFB6	6028LOY01C(H)	1		
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTD HXG	DATE 04/23/09'	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME WFB6-01P-1Y-00A (H)	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFD	DATE		
		APPVL	DATE		
		MATERIAL :			
	ANGLES ± 1°	G.E :		DRAWING NO. WFB6-E01	SIZE A3
	THIRD ANGLE PROJECTION	FINISH:		/PART NO.	REV TO 06/28/11'
		SCALE : 1:1		DO NOT SCALE DRAWING	SHEET 1 OF 1