
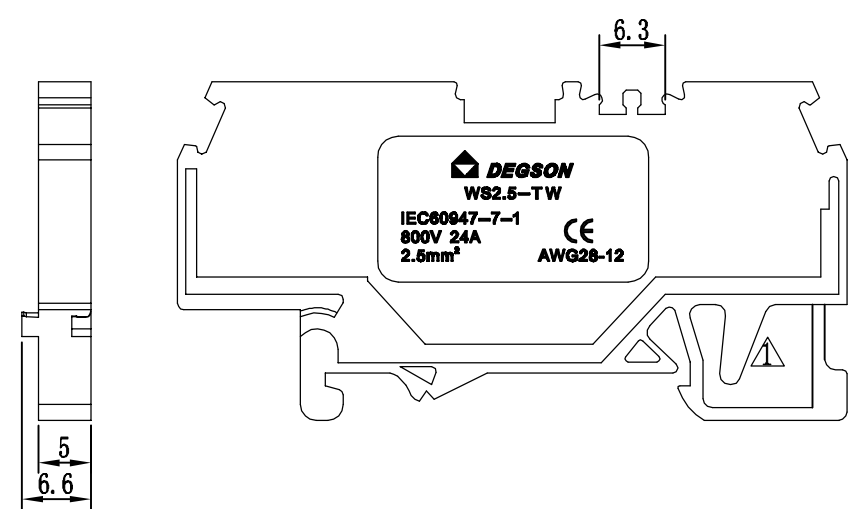


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加限位结构	CW	06/18/09
△		更新图面	Gary Huang	04/26/10*

Notes:

1. Rated current/voltage: UL1059 600V/15A
IEC 800V/24A
2. Operation temperatures: -40°C ~ +105°C
3. Withstanding Voltage: AC8000V/1min
4. Insulation Resistance: 1000MΩ / DC500V
5. Wire Range: 28~12AWG, 2.5mm²
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10	over 30	over 60	over 100	over 150	—	
to 6	to 10	to 24	to 30	to 60	to 100	to 150	∩ ◇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1	

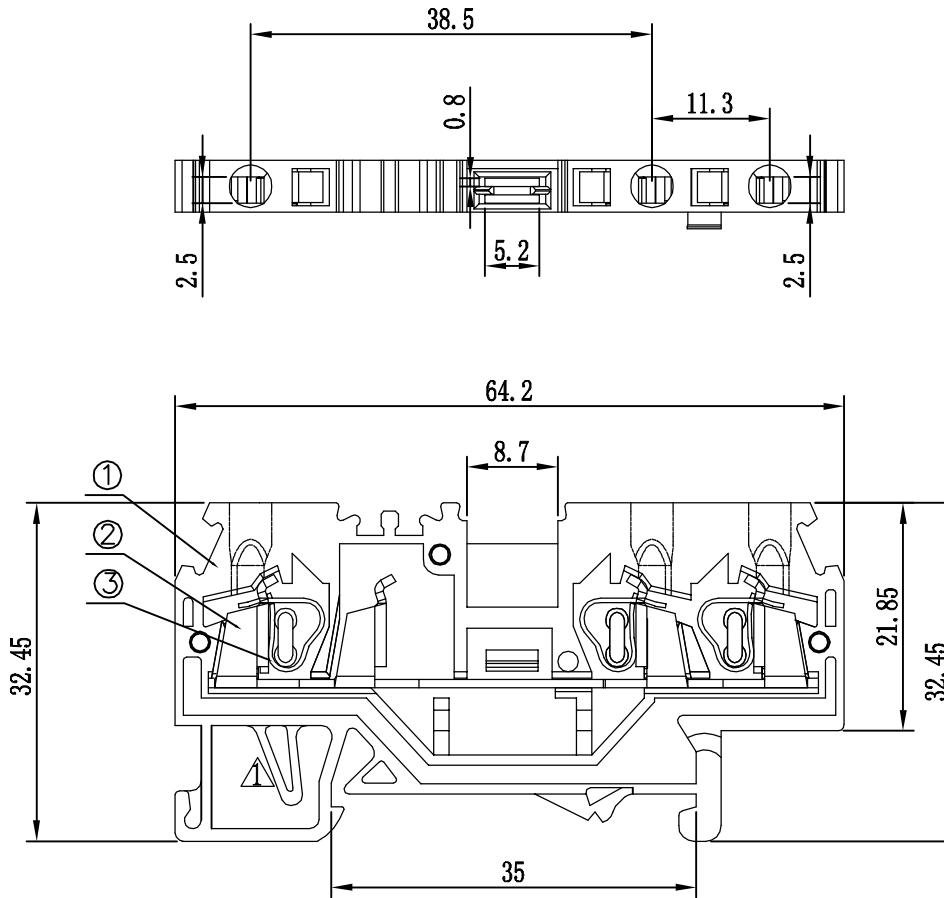

3	DG242-5.0-Shrapnel	X000000990(H)	3	Stainless steel	
2	WS2.5-TW-Current Carrier	6130B00010(H)	1	Copper	SnCe
1	WS2.5-TW-Housing	6130A0Y01A(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DIMENSIONAL LIST	← MM (INCH) →	DFTD LYK	DATE 02/29/08*		
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
.00 ±	MATERIAL :				
.000 ±	G. B. :				
ANGLES ± 1°	FINISH :				
THIRD ANGLE PROJECTION	SCALE : 1:1				
DO NOT SCALE DRAWING			SHEET 1 OF 1		

宁波高正电子有限公司
 DEGSON® DEGSON ELECTRONICS CO., LTD
 NAME
WS2.5-TW-01P-1Y-00A(H)

DRAWING NO. WS2.5-TW-E01 SIZE A3 REV T2
 /PART NO. 04/26/10*