


M8/M12 CONN SERIES


CHOGORI

M12 Series Specifications

M12 Series, Panel Mount & Male Pin.A.B.D-Coding

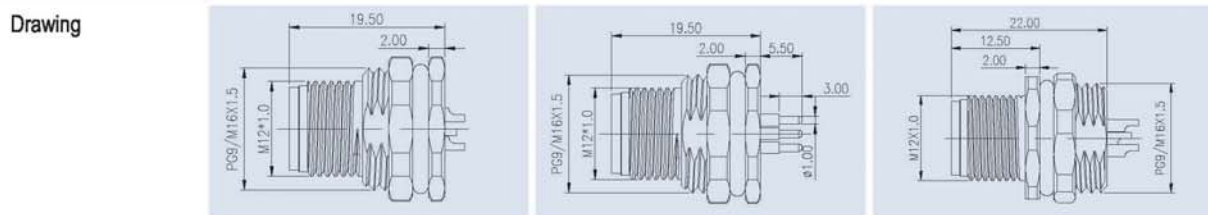

	A			B			D			
	Contacts	Fixing Thread	Part Number	Contacts	Fixing Thread	Part Number	Contacts	Fixing Thread	Part Number	
A.B.D-Coding	3	M16X1.5	54035X05-01	3	M16X1.5	54035X05-02	3	M16X1.5	54125X05-03	54035X05-03
		PG9	54035X05-11		PG9	54035X05-12		PG9	54125X05-13	54035X05-13
	4	M16X1.5	54045X05-01	4	M16X1.5	54045X05-02	4	M16X1.5	54125X05-03	54045X05-03
		PG9	54045X05-11		PG9	54045X05-12		PG9	54125X05-13	54045X05-13
	5	M16X1.5	54055X05-01	5	M16X1.5	54055X05-02	5	M16X1.5	54125X05-03	54055X05-03
		PG9	54055X05-11		PG9	54055X05-12		PG9	54125X05-13	54055X05-13
8	M16X1.5	54085105-01	8	M16X1.5	54085105-02	8	M16X1.5	54125105-03	54085X05-03	
	PG9	54085105-11		PG9	54085105-12		PG9	54125105-13	54085X05-13	
A-Coding	12	M16X1.5	54125105-01	12	M16X1.5	54125105-02	12	M16X1.5	54125105-03	
		PG9	54125105-11		PG9	54125105-12		PG9	54125105-13	

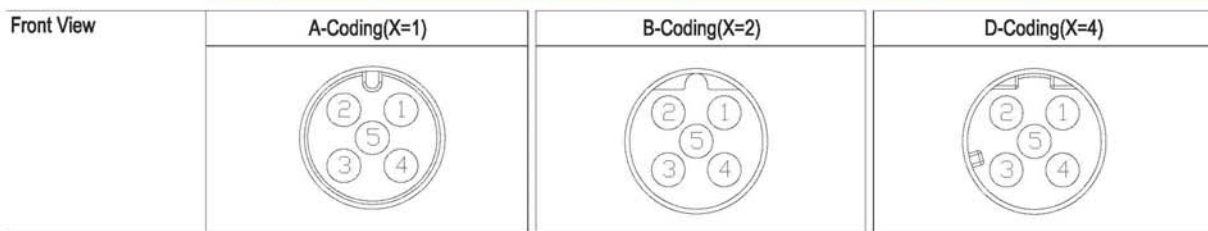

Specifications					
Number of Contacts	3	4	5	8	12
Wire Gauge	0.34mm ² (22AWG)			0.25mm ² (24AWG)	0.14mm ² (26AWG)
Cable Range	Max. 6.0mm				
Environmental Protection	IP67				
Mechanical Life	100 mating cycles				
Operating Temperature	- 25°C - 85°C				
Voltage Rating	250V	250V	125V	60V	30V
Rated Current(40°C)	4A	4A	4A	2A	1A

COMBACT PROFILE
 500 Series
 Mini Series
 Standard Series
 Middle Series
 Large Series
 Distributor Series
 RJ45 Series
 USB Series
 D-Sub series
 D-Sub Series
 T-Adapters Series
 Splitter Series
 HDMI Series
 M Series Distributor
 M Series Distributor
 M8 Series
 G43 Series
 Round Connector
 BNC Large Series
 Protective Cap