
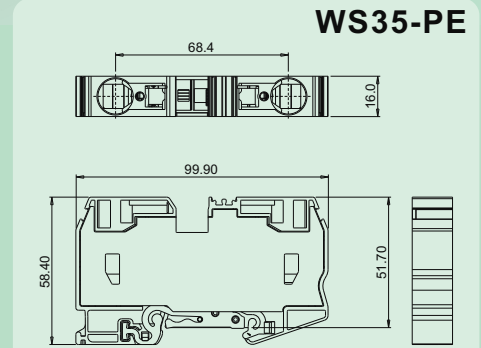


WS35/WS35-PE

- 笼式弹簧连接技术;
- 双桥接不仅可实现单独的链式桥接,还可对更小横截面的端子进行转换桥接;
- 可实现整体安装方案,带桥接及接地保护功能。
- Spring-cage connection technology;
- Double bridge function is available. It can not only be bridged with same size parts but also can be bridged with smaller size parts;
- Can be used in overall installation plan, with bridge accessories and PE function.

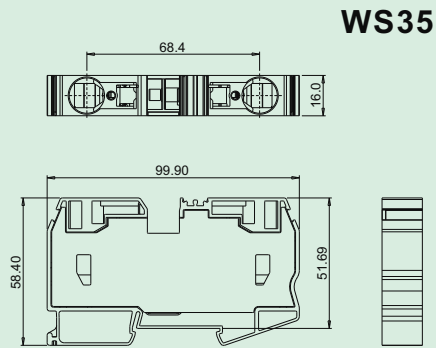

技术参数 Technical data

APPROVAL: CE

型号 Model	线径 Wire range (AWG/mm ²)	线数 Poles	IEC60947技术参数 (IEC60947 data sheet)		UL1059技术参数 (UL1059 data sheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
WS35	14-2/2.5-35	01P	1000	125	600	115
WS35-PE	14-2/2.5-35	01P	-	-	-	-

应用行业 Application

工业自动化、仪器仪表、安防等行业
industrial automation, instrument, security etc.



产品包装方式 Packing

Product model	Pcs./Pkt.
WS35-PE	10
WS35-PE	10

型号对照 Cross reference

DEGSON	同行1/Competitor1	同行2/Competitor2
WS35	P/ST35	-
WS35-PE	P/ST35-PE	-

产品订货 How to order

WS35	-	0	1	P	-	1	Y	-	0	0	A(H)
Series NO.											Standard
			1 Single pitch				通用色 General Color				
			2 Double pitch				Grey	PANTONE	430C		A(H)
							DEGSON		01		
WS35-PE	-	0	1	P	-	1	C	-	0	0	A(H)
Series NO.											Standard
			1 Single pitch				通用色 General Color				
			2 Double pitch				Green-yellow	PANTONE	-		A(H)
							DEGSON		0C		